

ORIGINAL

SIDE ONE

CONFIDENTIAL RELEASED

MAY 24 1991

STATE CORPORATION COMMISSION OF KANSAS  
OIL & GAS CONSERVATION DIVISION  
WELL COMPLETION FORM  
ACO-1 WELL HISTORY  
DESCRIPTION OF WELL AND LEASE

Operator: License # 4767

Name: Ritchie Exploration, Inc.

Address 125 N. Market

Suite 1000

City/State/Zip Wichita, KS 67202

Purchaser: n/a

Operator Contact Person: Rocky Milford

Phone (316) 267-4375

Contractor: Name: Red Tiger Drilling

License: 5302

Wellsite Geologist: Jeff Christian

Designate Type of Completion

New Well  Re-Entry  Workover

Oil  SWD  Temp. Abd.

Gas  Inj  Delayed Comp.

Dry  Other (Core, Water Supply, etc.)

If ~~OWO~~ old well info as follows:

Operator: \_\_\_\_\_

Well Name: \_\_\_\_\_

Comp. Date \_\_\_\_\_ Old Total Depth \_\_\_\_\_

Drilling Method:

Mud Rotary  Air Rotary  Cable

4-11-90 4-23-90 4-24-90  
Spud Date Date Reached TD Completion Date

API NO. 15- 057-20,484-0000

County Ford FROM CONFIDENTIAL

C SW Sec. 1 Twp. 25 Rge. 21W  East  West

1320 Ft. North from Southeast Corner of Section

3960 Ft. West from Southeast Corner of Section

(NOTE: Locate well in section plat below.)


Lease Name W. Stegman Well # 1

Field Name wildcat

Producing Formation n/a

Elevation: Ground 2289' KB 2294'

Total Depth 4736' PBTD n/a

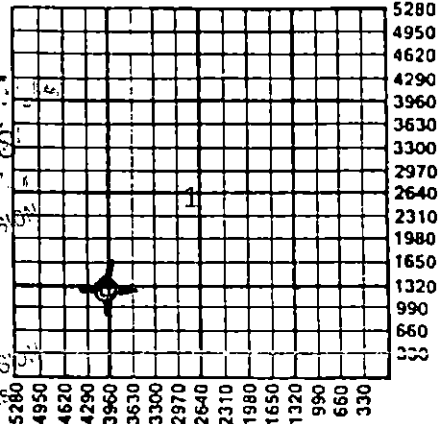

ACT II  
D&A

PLEASE KEEP THIS INFORMATION CONFIDENTIAL  
MAY 31 1990  
STATE CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
Wichita, Kansas

Amount of Surface Pipe Set and Cemented at 220 Feet

Multiple Stage Cementing Collar Used?  Yes  No

If yes, show depth set \_\_\_\_\_ Feet

If Alternate II completion, cement circulated from \_\_\_\_\_

feet depth to \_\_\_\_\_ w/ \_\_\_\_\_ sx cmt.

INSTRUCTIONS: This form shall be completed in triplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 120 days of the spud date of any well. Rule 82-3-130, 82-3-107 and 82-3-106 apply. Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months. One copy of all wireline logs and drillers time log shall be attached with this form. ALL CEMENTING TICKETS MUST BE ATTACHED. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells. Any recompletion, workover or conversion of a well requires filing of ACO-2 within 120 days from commencement date of such work.

All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature \_\_\_\_\_

Title President Date 5/11/90

Subscribed and sworn to before me this 11<sup>th</sup> day of May, 19 90.

Notary Public Linda K. Rice

Date Commission Expires 6-7-92



K.C.C. OFFICE USE ONLY  
F  Letter of Confidentiality Attached  
C  Wireline Log Received  
C  Drillers Timelog Received  
Distribution  
 KCC  SWD/Rep  NGPA  
 KGS  Plug  Other (Specify)



Ritchie Exploration, Inc.  
#4767  
#1 W. Stegman  
C SW  
Section 1-25S-21W  
Ford County, KS  
ACO-1  
Page 2

ORIGINAL

RELEASED

MAY 24 1991

FROM CONFIDENTIAL

PLEASE KEEP THIS  
INFORMATION  
CONFIDENTIAL

DRILL STEM TESTS

DST #1 from 4134' to 4160' (Lansing "B" zone). Recovered 40' of mud and 420' of water.  
IFP:45-168#/45"; ISIP:1195#/45";  
FFP:202-247#/45"; FSIP:1184#/45".

DST #2 from 4250' to 4276' (L/KC "H" zone). Recovered 1,080' of muddy water.  
IFP:225-500#/15"; ISIP:1406#/30";  
FFP:606-751#/15"; FSIP:1384#/30".

DST #3 from 4627' to 4688' (Ft. Scott and Cherokee). Recovered 90' of slightly oil cut mud (22% gas, 8% oil, 70% mud).  
IFP:67-90#/30"; ISIP:840#/30";  
FFP:90-112#/30"; FSIP:202#/30".

DST #4 from 4688' to 4730' (Miss. Osage). Recovered 5' of mud, no show of oil.  
IFP:56-56#/30"; ISIP:90#/30";  
FFP:56-56#/30"; FSIP:78#/30".

DST #5 from 4729' to 4736' (Miss. Osage). Recovered 110' of muddy water, scum of oil.  
IFP:67-67#/45"; ISIP:1583#/45";  
FFP:78-78#/45"; FSIP:1594#/45".

SAMPLE TOPS

Anhydrite	1409' (+ 885)
B/Anhydrite	1419' (+ 875)
Heebner	3999' (-1705)
Lansing	4113' (-1819)
Stark Sh.	4355' (-2061)
B/KC	4457' (-2163)
Marmaton	4482' (-2188)
Pawnee	4565' (-2271)
Cherokee	4663' (-2369)
Miss. Ln.	4710' (-2416)
Miss. Osage	4725' (-2431)
RTD	4736' (-2442)

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 31 1990

CONSERVATION DIVISION  
Wichita, Kansas

Phone 913-483-2627, Russell, Kansas  
 Phone 316-793-5861, Great Bend, Kansas

ORIGINAL

RELEASED

Phone Plainville 913-434-2812

MAY 2 4 1991  
 Phone Ness City 913-798-3843

**ALLIED CEMENTING CO., INC.**

FROM CONFIDENTIAL No. 6395

Home Office P. O. Box 31

Russell, Kansas 67665

New

Date	4-24-90	Sec.	1	Twp.	25	Range	21	Called Out	✓	On Location	2:30 PM	Job Start	4:00 PM	Finish	6:10 PM
Leas	W. Stinson	Well No.	1	Location	Offerle 2 1/4 W 1/4 NE 1/4			County	FORD	State	KS				
Contractor	Cecil Tigar Only #6			Owner	Same										
Type Job	Plug To Abandon (Rotary Plug)			To Allied Cementing Co., Inc. You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.											
Hole Size	7 7/8		T.D.	4736'											
Csg.			Depth												
Tbg. Size			Depth												
Drill Pipe	4 1/2		Depth	1428'											
Tool			Depth	PLEASE KEEP											
Cement Left in Csg.			Shoe Joint	INFORMA											
Press Max.			Minimum	CONFIDENTIAL											
Meas Line			Displace												
Perf.															

Charge To: Ritchie P. Pappalardo  
 Street: 125 N. Market Suite 1000  
 City: Wichita State: KS. 67202

The above was done to satisfaction and supervision of owner agent or contractor

Purchase Order No. *Handwritten*

EQUIPMENT

BT. Bend No.	Cementer	Phil
Pumptrk 195	Helper	JACK
No.	Cementer	
Pumptrk	Helper	
	Driver	JACK S.
Bulktrk 68	Driver	

CEMENT

Amount Ordered: 175 SKS 60/40 6% gel

Consisting of:

Common	105	525.00
Poz. Mix	70	157.50
Gel.	7	47.25
Chloride		
Quickset		
Sales Tax		
Handling		157.50
Mileage 56		294.00
MAY 01 1990	Sub Total	
	Total	1181.25

DEPTH of Job

Reference:	Pump In Chg	360.00
	Pump In Plug	56.00
	1 8 7/8 Plug	20.00
	Sub Total	
	Tax	436.00
	Total	447.00

Remarks:

50 SKS - 1428' spot with mud

50 SKS - 815' spot with mud

50 SKS - 250'

105 SKS Aug - 40'

15 SKS - Patch hole

Thank You!

RECEIVED  
 STATE COMMISSION  
 CONSERVATION DIVISION  
 Wichita, Kansas

RELEASED

Phone 913 483-2627, Russell, Kansas  
Phone 316-793-5861, Great Bend, Kansas

ORIGINAL MAY 24 1991 Phone Plainville 913-434-2812

Phone Ness City 913-798-3843

FROM CONFIDENTIAL

# ALLIED CEMENTING CO., INC. No 8109

Home Office P. O. Box 31

Russell, Kansas 67665

Date <i>4-11-90</i>	Sec. <i>1</i>	Twp. <i>25</i>	Range <i>21</i>	Called Out <i>4:15 PM</i>	On Location <i>7:00 PM</i>	Job Start <i>9:00 PM</i>	Finish <i>9:15 PM</i>
Lease <i>W. Stegman</i>		Well No. <i>1</i>	Location <i>Offshore 2 1/4 N</i>			County <i>Ford</i>	State <i>Kansas</i>

Contractor <i>Red Tiger</i>	Owner <i>Ritchie</i>
Type Job <i>Surface</i>	To Allied Cementing Co., Inc. You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.
Hole Size <i>12 1/4</i>	T.D. <i>220'</i>
Csg. <i>8 5/8</i>	Depth <i>220'</i>
Tbg. Size	PLEASE KEEP THIS INFORMATION CONFIDENTIAL
Drill Pipe	
Tool	
Cement Left in Csg. <i>15'</i>	Shoe Joint
Press Max.	Minimum
Meas Line <i>no</i>	Displace <i>13.05</i>
Perf.	

Charge To <i>Ritchie Exploration Inc</i>	Street <i>125 N. Market Suite 1000</i>
City <i>Wichita</i>	State <i>Ks 67202</i>
The above was done to satisfaction and supervision of owner agent or contractor.	
Purchase Order No.	
X <i>Harold J. Ford</i>	CEMENT
Amount Ordered <i>125 sk 60% 2% gel 3% cc</i>	
Consisting of	

EQUIPMENT		
No.	Cementer	
Pumptrk # <i>158</i>	Helper	
No.	Cementer <i>Jason</i>	
Pumptrk	Helper <i>Bill</i>	
Bulktrk # <i>199</i>	Driver <i>Johnny</i>	
Bulktrk	Driver	

Common <i>75</i>	<i>5.00</i>	<i>375.00</i>
Poz. Mix <i>50</i>	<i>2.25</i>	<i>112.50</i>
Gel. <i>3</i>	<i>6.75</i>	<i>NIC</i>
Chloride <i>4</i>	<i>20.00</i>	<i>80.00</i>
Quickset		
APR 17 1990		
Handling <i>125</i>	<i>.90</i>	<i>112.50</i>
Mileage <i>56</i>		<i>210.00</i>
Sub Total		
Total		<i>890.00</i>

DEPTH of Job	
Reference:	
<i>Pump truck charge</i>	<i>360.00</i>
<i>Mileage</i>	<i>56.00</i>
<i>1-8 5/8 T.W.P.</i>	<i>40.00</i>
Sub Total	
Tax	
Total	<i>456.00</i>

Floating Equipment	
Total # <i>1346.00</i>	
Disc. - <i>269.20</i>	
<i>\$ 1076.80</i>	

Remarks: *Cement did circulate!*  
*3 bbl cement*

RECEIVED  
STATE COMMERCE COMMISSION  
MAY 9 1990  
Wichita, Kansas

*Thank you*

STATE COMMERCE COMMISSION  
MAY 9 1990  
Wichita, Kansas