


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

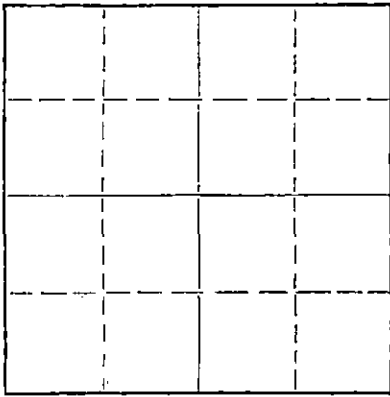

Locate well correctly on above
Section Plat

Edwards County, Sec. 28 Twp. 26 Rge. 16 (E) (W)
Location as "NE/CNW/SW" or footage from lines NE NE NW
Lease Owner Santa Fe Pipe & Supply
Lease Name Giles Well No. 1
Office Address Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced October 14 1961
Plugging completed October 17 1961
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Kackamp
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded hole back to 1430
Dumped 5 sacks on top
Cut pipe from 8 5/8 to 5 1/2 hole cemented
Pushed bridge plug to 275' 30 foot rock bridge 25 sacks cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pipe Pullers, Inc.
Address Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Pipe Pullers Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jean Stells

(Address)

SUBSCRIBED AND SWORN to before me this 25 day of October, 1961

My commission expires December 18, 1962

Janita R. Myers
Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

15-047-00040-0000


COPY

Company- CLARK KNIGHT DRLG.
Farm- Giles No. 1

SEC. 28 T. 26 R. 16W
NE NE NW

Total Depth. 4560'
Comm. 5-19-56 Comp. 6-6-56
Shot or Treated.
Contractor.
Issued. 8-11-56

County Edwards
KANSAS / / /



Elevation. 2092'

Production. 1,500,000 CF/GPD

CASING:

8 5/8" 365' cem w/225 sx
5 1/2" 4559'

Figures indicate Bottom of Formations.

sand, gravel	320
gravel, iron	329
sand, shale, shells	365
shale, shells	420
sand, shale	530
shale, shells	580
shale, shells	765
sand, shale	1000
shale, shells	2030
lime, shale	2320
lime	2470
sand, shale	2490
lime	2600
lime, shale	3600
lime	3699
lime, shale	3990
lime	4030
lime, shale	4060
lime	4360
lime, shale	4465
lime, sand	4475
chert	4484
shale	4488
shale, lime	4508
lime, chert	4526
sand	4560

Total Depth
4560 = 4556 SLM TD

Tops: Scout	
Anhydrite	3825
Toronto	3852
Douglas	3868
Brown Lime	3974
Lansing-Kansas City	3983
Base Kansas City	4336
Cherokee Sand	4470
Ch. Conglomerate	4475
Mississippi	4491
Kinderhook Sand	4524

RECEIVED
STATE CORPORATION COMMISSION

DEC 8 1961

CONSERVATION DIVISION
Wichita, Kansas