


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

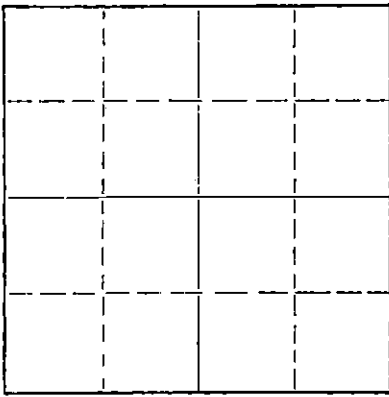

Locate well correctly on above
Section Plat

— Edwards County. Sec. 28 Twp 26 Rge. 16 (E) — (W)
Location as "NE/CNWxSWx" or footage from lines. NW SE NE
Lease Owner Santa Fe Pipe & Supply
Lease Name Giles Well No. 2
Office Address Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced September 28 1961
Plugging completed October 13 19 61
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Worked bailer from 2300' to bottom, sanded well back from 4550 back to 4520
Dumped 5 sacks cement
Worked pipe tension 26"
spotted oil pumped plug to 3890 w/1100 lbs pressure
Pumped 60 lbs oil back in pipe
Bailed hole to 290' with 25 sacks cement,
Filled hole with mud to 32' and 10 sacks cement

STAMPED
DEF 2
CONSERVATION DIVISION
Wichita

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pipe Pullers Inc.
Address Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Pipe Pullers Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Bees

(Address)

SUBSCRIBED AND SWORN to before me this 25 day of October, 19 61

My commission expires December 18, 1961

Guarita R. Myers
Notary Public.



WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY
15-047-10055-0000

Company- CLARK KNIGHT
Farm- Giles No. 2

SEC. 28 T. 26 R. 16W
NW SE NE

Total Depth. 4590'
Com. 11-16-56 Comp. 12-9-56
Shot or Treated.
Contractor.
Issued. 10-26-57

County Rush
KANSAS



CASING:

8" 365'
5" 4587'

Elevation. 2094

Production. Dry

Figures indicate Bottom of Formations.

surface soil	35
surface rock-sand-gravel	257
shale-sand	367
red rock-shale	610
sand	1000
shale-sand	1095
shale	1105
shale-shells	1170
red rock-shale	1295
shale-shells	1875
shale-lime	2055
lime	2305
lime-shale	2470
sand-shale	2480
lime	2535
lime-shale	2605
lime	2690
lime-shale	3863
shale	3875
lime	4403
lime-shale	4497
sand	4590
Total Depth	
TOPS: Scout	
Kansas City	4005
Cherokee	4090
Mississippi	4530
Kinderhook	4585

RECEIVED
STATE CORPORATION COMMISSION

DEC 8 1957
CONSERVATION DIVISION
Wichita, Kansas