

5-047-20215-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

EDWARDS County, Sec. 35 Twp. 26S Rge. (E) 19 (W)

Location as "NE/CNW/SW" or footage from lines 100' C NE SE
Lease Owner VOYAGER PETROLEUM INC.
Lease Name BESSIE EDWARDS Well No. 1
Office Address 600 Copper Oaks Bldg, 7030 S. Yale, Tulsa, Okla. 74136
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 10/8 19 76
Application for plugging filed 10/8 19 76
Application for plugging approved 10/8 19 76
Plugging commenced 10/8 19 76
Plugging completed 10/8 19 76
Reason for abandonment of well or producing formation dry hole

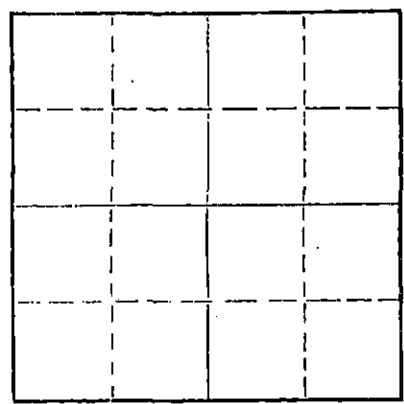

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well RUSS BIBERSTEIN
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4850 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Sand and Clay		0	456	8 5/8	456	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug - 400' w/38 sx.
2nd plug - 40' w/15 sx
5 sx in rat hole 2 sx in water well
Hole plugged at 3 PM Oct. 8, 1976

RECEIVED
STATE CORPORATION COMMISSION
OCT 18 1976
10-18-76
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor GABBERT-JONES, INC.
Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
GABBERT JONES, INC. (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack W. Gabbert
Jack W. Gabbert, Exec. Vice President
830 Sutton Place, Wichita, Kansas 67202
(Address)

Sworn to before me this 15 day of October, 19 76



Nov. 29, 1979
Marjorie Hall
Notary Public.

GABBERT-JONES, INC.
 WICHITA, KANSAS
 DRILLERS' WELL LOG

Bessie Edwards
 100' C-NE-SE Sec 35-26S-19W
 Edwards County Kansas

Commenced: 9-26-76

Completed: 10-8-76

15-047-20215-0000

OPERATOR: Voyager Petroleum, Inc.

Depth		Formation	Remarks
From	to		
0	405	Sand-Clay	Ran 11 jts of 23# 8 5/8" csg sat @ 456' Cemented w/ 400 sls Common 2% Gel
405	456	Clay	
456	700	Shale-Redbed	3% CC PD @ 11:00 p.m. 9-26-76
700	1597	Shale-Shells	
1597	2146	Redbed	
2146	2353	Shale-Lime	
2353	2853	Lime-Shale	
2853	3707	Lime	
3707	4136	Lime-Shale	
4136	4658	Lime	
4658	4728	Lime-Chert	
4728	4850	Lime	
	4850 - TD		DRY & ABANDONED

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, the undersigned, being duly sworn on oath, state that the above Drillers Log is true and correct to the best of my knowledge and belief and according to the records of this office.

GABBERT-JONES, INC.

James S. Sutton II
 JAMES S. SUTTON II

Subscribed and sworn to before me this 14th day of October, 1976.

Elizabeth J. Edwards
 ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission expires February, 6, 1979.

RECEIVED
 STATE CORPORATION COMMISSION

OCT 18 1976

CONSERVATION DIVISION
 Wichita, Kansas

