

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Edwards County, Sec. 9 Twp. 25S Rge. 17W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

C/2 NW SW

Lease Owner John Jay Darrah, Jr.

Lease Name Sibley #1 Well No. 1

Office Address 405 Century Plaza, Wichita, Kansas 672027

Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

Date Well completed July 17, 1981

Application for plugging filed July 17, 1981

Application for plugging approved July 17, 1981

Plugging commenced 4:00 AM, July 17, 1981

Plugging completed 6:15 AM, July 17, 1981

Reason for abandonment of well or producing formation
Dry Hole


If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Leslie

Producing formation Depth to top Bottom Total Depth of Well 4495'

Show depth and thickness of all water, oil and gas formations.

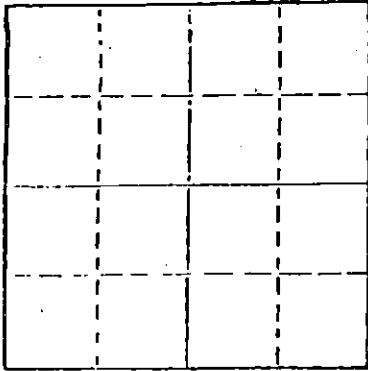

Locate well correctly on above
Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	251	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud.
Heavy mud to 950' with 60 sacks 50/50 Pozmix with 4% gel and 3% cc through open ended drill pipe; heavy mud to 310' with 40 sacks through open ended drill pipe; heavy mud to 40' with Howco Plug and 1/2 sack hulls, solidbridge at 40' with 10 sacks to surface 10 sacks in rathole.

RECEIVED
STATE CORPORATION COMMISSION
7-21-81
JUL 21 1981
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sterling Drilling Company, P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE, ss.
F. A. Wuellner (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

STERLING DRILLING COMPANY

(Signature) F. A. Wuellner
F. A. Wuellner, Secretary
P. O. Box 129, Sterling, Kansas 67579
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of July, 19 81



Agnes D. Wurst
Agnes D. Wurst, Notary Public.

My commission expires

STERLING DRILLING COMPANY
P. O. Box 129
Sterling, Kansas 67579

WELL LOG - - - - - SIBLEY #1
Located: C/2 NW SW, Section 9-25S-17W, Edwards County, Kansas

OWNER: John Jay Darrah, Jr.
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: July 11, 1981
COMPLETED: July 17, 1981

TOTAL DEPTH: 4495'

<u>LOG</u>	<u>CASING RECORD</u>
0 - 255 Sand and Shale	Ran 6 joints 8 5/8", 23# new casing.
255 - 1160 Shale	240.47' pipe set at 251' K.B. Cemented with 225 sacks 60/40 Pozmix with 3% cc.
1160 - 1173 Anhydrite	Plug down at 4:00 PM, 7-11-81, by Howco.
1173 - 2200 Shale and Lime Stringers.	
2200 - 4430 Lime and Shale	
4430 - 4495 Lime	Lugged.

Deviation Surveys: 2 3/4° at 2200'
1 1/2° at 4495'