


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

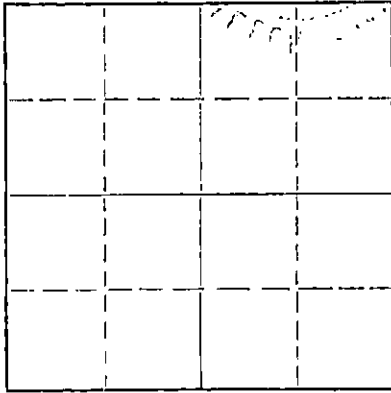

Locate well correctly on above
Section Plat

WELL PLUGGING RECORD

Edwards County, Sec. 22 Twp. 25 Rge. 16 (E) (W) x

Location as "NE/CNWxSWx" or footage from lines C SE SE

Lease Owner American Petrofina Co. of Texas

Lease Name Budde SWD Well No. #3

Office Address Box 209, Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19

Plugging commenced 12-8-69 19

Plugging completed 12-11-69 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Ralph J. Warren

Producing formation Depth to top Bottom Total Depth of Well 4435' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	4434'	3439.35'
				8 5/8"	425'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand from 4066' to 4050'. Mixed and ran 5 sacks cement thru dump bailer from 4050' to 4010'.

Mudded hole from 4010' to 275', set 10' rock bridge from 275' to 265'. Mixed and ran 4 sacks cement thru dump bailer from 265' to 250'. Mixed and ran 21 sacks cement thru dump bailer from 250' to 190'. Mudded hole from 190' to 40', set 10' rock bridge from 40' to 30'.

Mixed and dumped 10 sacks cement from 30' to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
DEC 15 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.

Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.


Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer

Box 364, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 12 day of 12, 1969

My commission expires 1972



Notary Public.

DRILLERS LOG

Budde A - 3

Loc: Cntr. SE SE

SEc: 22-25S-16W

Edwards County, Ks.

Company: Honaker-Davis Drlg. Co., etal

Contractor: Honaker-Davis Drlg. Co.

Comm: 7-14-59

Comp: 7-27059

Rotary Total Depth: 4435'


Casing: 8-5/8" at 425'

5-1/2" at 4432'


0	165	Sand & Gravel	
165	300	Shale	
300	335	Sand	
335	426	Shale	8-5/8" casing cemented at 425' w/
426	650	Shale & Shells	300 sacks cement & 8 sacks Calcium
650	1060	Shale & Red Bed	Chloride.
1060	1080	Anhydrite	
1080	1600	Shale & Shells	
1600	1850	Shale & Red Bed	
1850	3835	Lime & Shale	
3835	3900	Shale & Lime	
3900	3975	Lime & Shale	
3975	4042	Lime	
4042	4130	Lime & Shale	
4130	4187	Lime	
4187	4330	Lime & Shale	
4330	4338	Lime	
4338	4359	Lime & Chert	
4359	4371	Shale, Chert & Sand	
4371	4410	Lime & Chert	
4410	4435	Shale & Chert	5-1/2" casing cemented at 4432' w/
4435		Total Rotary Depth	150 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
SEP 22 1969
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is the true and correct copy of the
above log, to the best of my knowledge.


H. S. Forbes

Subscribed and sworn to before me this 28th day of
July, 1959./

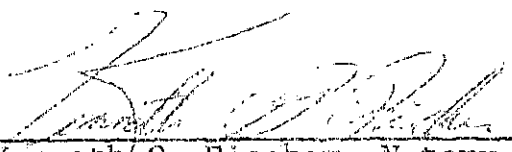
Kenneth G. Fischer, Notary Public.

My Commission Expires: 6-25-63

