

15-057-20009-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Ford County, Sec. 6 Twp. 26S Rge. 21W (X) (W)

Location as "NE/CNW/SW" or footage from lines C NE SE

Lease Owner Walters Drilling Co.

Lease Name Rueb Well No. 1

Office Address 400 Insurance Building - Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 4-21-68 19

Application for plugging filed 4-21-68 19

Application for plugging approved 4-21-68 19


Plugging commenced 4-21-68 19

Plugging completed 4-21-68 19

Reason for abandonment of well or producing formation commercial quantities of oil not found

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

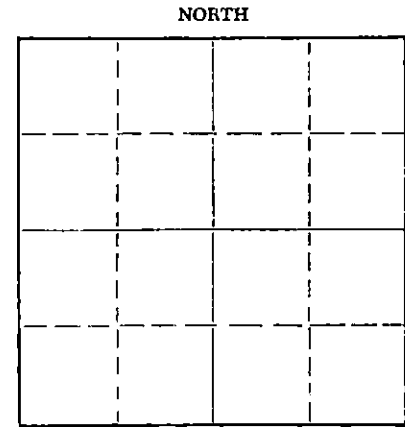

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Edgar Eves

Producing formation Depth to top Bottom Total Depth of Well 4950 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	356'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug @ 900' - pumped 100 sacks cement to 500'
2nd plug @ 350' w/ 30 sacks cement
Top plug @ 45' w/ 15 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
APR 23 1968
CONSERVATION DIVISION
Wichita, Kansas
4-23-68

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Walters Drilling Co.
Address 400 Insurance Building - Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. Robert F. Walters


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert F. Walters

400 Insurance Building - Wichita, Kansas 67202 (Address)

Subscribed and sworn to before me this 23rd day of April, 1968

My commission expires October 4, 1971
Notary Public. Juanita M. Green



DRILLER'S LOG

15-057-26009-0000

COMPANY: WALTERS DRILLING CO.
 400 INSURANCE BUILDING
 WICHITA, KANSAS 67202

WELL NAME: RUEB #1
 C NE SE SECTION 6-26S-21W
 FORD COUNTY, KANSAS

CONTRACTOR: WALTERS DRILLING CO.
 400 INSURANCE BUILDING
 WICHITA, KANSAS 67202

ROTARY DRILLING COMMENCED: APRIL 8, 1968
 ROTARY DRILLING COMPLETED: APRIL 21, 1968

ELEVATION: 2338 KB

CASING RECORD: 8 5/8" @ 356' w/ 190 sacks cement

LOG

0 - 190	Surface Clay
190 - 356	Clay and Shale
356 - 845	Sand and Clay
845 - 882	Anhydrite
882 - 1400	Shale
1400 - 1410	Anhydrite
1410 - 1715	Lime and Shale
1715 - 2045	Shale and Lime Streaks
2045 - 2376	Shale
2376 - 2550	Shale and Lime
2550 - 2784	Lime and Shale
2784 - 3122	Shale and Lime
3122 - 3215	Lime and Shale
3215 - 3482	Shale and Lime
3482 - 3950	Lime and Shale
3950 - 4100	Lime
4100 - 4200	Lime and Shale
4200 - 4758	Lime
4758 - 4805	Lime and Chert
4805 - 4824	Lime
4824 - 4862	Miss.
4862 - 4874	Lime and Chert
4874 - 4920	Lime and Chert
4920 - 4950	Chert
<u>4950</u>	<u>Rotary Total Depth</u>


RECEIVED
 STATE CORPORATION COMMISSION
 APR 23 1968
 CONSERVATION DIVISION
 Wichita, Kansas


The undersigned, Robert F. Walters, hereby certifies, in behalf of said company that the above log is a true and correct log of the formations encountered in drilling the above well as reflected by the Daily Drilling Reports.

WALTERS DRILLING CO.

BY 
 ROBERT F. WALTERS, Partner

Subscribed and sworn to before me
 this 23rd day of April, 1968.




 Juanita M. Green, Notary Public

Commission Expires: October 4, 1971