


15-047-00292-00-01

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

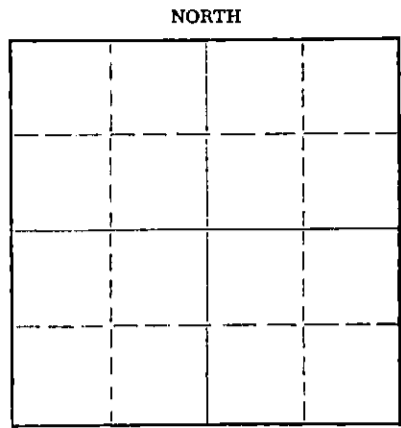

EDWARDS County. Sec. 17 Twp. 25 Rge. (E) 17 (W)
Location as "NE/CNW/SW" or footage from lines SW SW SE
Lease Owner SANTA-FE PIPE & SUPPLY, INC.
Lease Name HUPP Well No. 1
Office Address BOX 562, GREAT BEND, KANSAS 67530
Character of Well (completed as Oil, Gas or Dry Hole) WASHDOWN
Date well completed _____ 19____
Application for plugging filed APRIL 6 19 66
Application for plugging approved APRIL 11 19 66
Plugging commenced APRIL 21 19 66
Plugging completed MAY 4 19 66
Reason for abandonment of well or producing formation DRY

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well A. ELVING
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4650 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	245.5'	NONE
				5 1/2"	4550'	3943.04'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- 4650' - 4450' - SAND
- 4450' - 4410' - 5 SACKS CEMENT
- 4410' - 240' - MUD
- 240' - 230' - ROCK BRIDGE
- 230' - 209' - 7 SACKS CEMENT
- 209' - 155' - 18 SACKS CEMENT
- 155' - 40' - MUD
- 40' - 30' - ROCK BRIDGE
- 30' - BASE - 10 SACKS CEMENT

RECEIVED
STATE CORPORATION COMMISSION

JUN - 3 1966
6-3-66
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor SANTA-FE PIPE & SUPPLY, INC.
Address BOX 562, GREAT BEND, KANSAS 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
T. L. NUTT (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T. L. Nutt

BOX 562, GREAT BEND, KANSAS 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of MAY, 19 66

My commission expires JULY 31, 1966

Mary M. Swanson
Notary Public.