


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

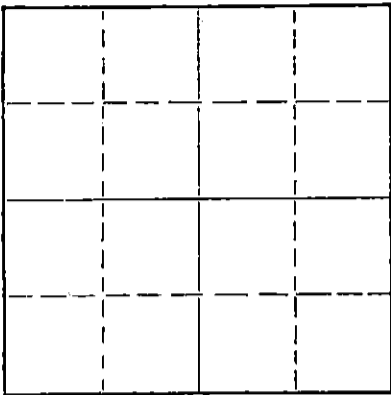

Locate well correctly on above Section Plat

Edwards County. Sec. 19 Twp. 25S. Rge. XXX-20 (W)
Location as "NE/CNW&SW" or footage from lines. C NW SW
Lease Owner. Pickrell Drilling Company
Lease Name. Herrmann "D" Well No. 1
Office Address. 705 Fourth National Bank Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed. November 20, 1969
Application for plugging filed. November 20, 1969
Application for plugging approved. November 20, 1969
Plugging commenced. November 20, 1969
Plugging completed. November 20, 1969
Reason for abandonment of well or producing formation. Dry Hole

If a producing well is abandoned, date of last production. 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. Archie V. Elving
Producing formation. Depth to top. Bottom. Total Depth of Well. 4784 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	312'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom Plug @ 300' w/35 Sacks Cement
Top Plug @ 40' 10 Sacks Cement



(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor. Pickrell Drilling Company
Address. 705 Fourth National Bank Bldg., Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.

C. W. Sebitts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebitts
705 Fourth National Bank Bldg, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 25th day of November, 1969



L. M. Whiting
Notary Public.

My commission expires May 10, 1970

ROTARY DRILLING LOG

COMPANY: Pickrell Drilling Company
705 Fourth National Bank Bldg.
Wichita, Kansas 67202

Rotary Drilling Commenced 11/7/69

Rotary Drilling Completed 11/20/69

LOCATION: Herrmann "D" No. 1, C NW SW Section 19-25S-20W
Edwards County, Kansas

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: Run 14 Jts. 28# 8-5/8" surface casing set @ 312' KB. Cemented with 190 sacks. Completed 9:45 P.M. November 7, 1969. Circulated.

No oil string run. D & A. Plugged November 20, 1969.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

40	Clay & Gravel	C.F.S.
200	Sandy Clay	4120
313	Shale - Red Shale	4140
525	Shale	4185
580	Sand	4222
750	Shale	4234
955	Red Beds	4260
1025	Sand	4285
1145	Shale - Red Beds	4300
1403	Shale & Shales	4330
1424	Anhydrite	4362
1610	Shale & Shells	4424
2140	Shale	4765
2555	Lime & Shale	4774
2695	Lime	4784
2945	Lime & Shale	
3865	Shale & Lime	
4774	Lime	
4784	Mississippian, RTD	

S.L.M.

Pipe strap .70 Long 3796'

Slope Tests

- 2000
- 2500
- 3000
- 3500
- 4000
- 4500

RECEIVED
STATE CORPORATION COMMISSION
DEC 5 1969
CONSERVATION DIVISION
Wichita, Kansas

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY

By [Signature]
C. W. Sebitts Attorney-in-Fact

STATE OF KANSAS }
COUNTY OF OWEN } ss.:

On this 25th day of November, 1969, before me the undersigned, a Notary Public, in and for

the County of OWEN, State of KANSAS, personally appeared C. W. Sebitts, to me known to be the individual person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as free and lawful agent and on behalf of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires: May 10, 1970

[Signature]
L. M. Whiting Notary Public

