


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

Form CP-4

WELL PLUGGING RECORD

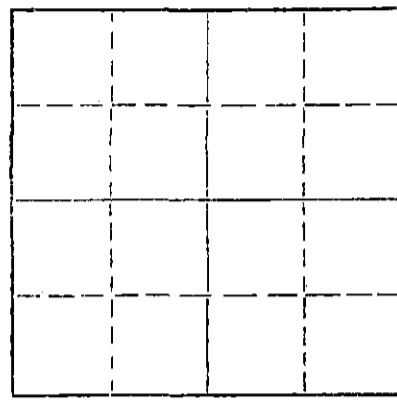

Locate well correctly on above
Section Plat

Reno County, Sec 29 Twp. 24S Rge. 7W K00 XW1
Location as "NE/CNWXSWX" or footage from lines NW NW SW
Lease Owner Hershberger Enterprises, Inc.
Lease Name Friesen "A" Well No. 1
Office Address Suite 230, O.W. Garvey Bldg., Wichita, Ks. 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 14, 1973
Application for plugging filed Verbal Application 19 73
Application for plugging approved Verbal Approval 19 73
Plugging commenced July 14, 1973
Plugging completed July 14, 1973
Reason for abandonment of well or producing formation _____
If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2,110 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS					CASING RECORD	
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	207'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 2,110 feet (rotary total depth) to 400 feet.
Set plug at 400 feet and cemented with 35 sacks cement.
Filled hole with heavy rotary mud from 400 feet to 195 feet.
Set plug at 195 feet and cemented with 25 sacks cement.
Filled hole with heavy rotary mud from 195 feet to 40 feet.
Set solid plug at 40 feet and cemented to cellar with 10 sacks cement, two sacks cement in rathole.

RECEIVED
STATE CORPORATION COMMISSION
JUL 26 1973
CONSERVATION DIVISION
Wichita, Kansas


7-26-73

Plugging operations accomplished utilizing Halliburton Oil Well Cementing pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor H-30, Inc.
Address 200 North Main, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Dean Britting, Agent (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 No. Main, Wichita, Kansas 67202
(Address)
SUBSCRIBED AND SWORN to before me this 25th day of July, 19 73
Elsie Willison
My commission expires June 30, 1974 Elsie Willison Notary Public.



15-155-20218-0000

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY Hershberger Enterprises, Inc.

SEC. 29 T. 24S R. 7W
LOC. NW NW SW


FARM Friesen "A" NO. 1

TOTAL DEPTH 2,110'
COMM. July 9, 1973
SHOT OR TREATED
CONTRACTOR H-30, Inc.
ISSUED

COMP. July 14, 1973

COUNTY Reno

KANSAS



CASING

20	10	
15	8	-5/8" 207' cemented w/225 sxs cement
12	6	
13	5	

ELEVATION 1,613' KB

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand	84'
Sand and Red Bed	208'
Shale and Shells	455'
Shale	1,164'
Lime and Shale	2,110'
Rotary Total Depth	2,110'

RECEIVED
STATE CORPORATION COMMISSION
JUL 30 1973
CONSERVATION DIVISION
Wichita, Kansas

7-30-73

I hereby certify the above and foregoing
to be a true and correct log of the
above described well as shown by the drilling
reports.

H-30, INC.

Dean Britting
Dean Britting

State of Kansas
County of Sedgwick

SS:

Subscribed and Sworn to before me a Notary
Public in and for said county and state
this 25th. day of July, 1973.



Elsie Willison
Elsie Willison - Notary Public