


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Edwards County, Sec. 36 Twp. 25 Rge. 18 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
SW SE NE

Lease Owner Wheeler Oil Company
Lease Name Gertrude Welsch #2 Well No. _____
Office Address Tulsa, Oklahoma 74145
Character of Well (Completed as Oil, Gas or Dry Hole) _____

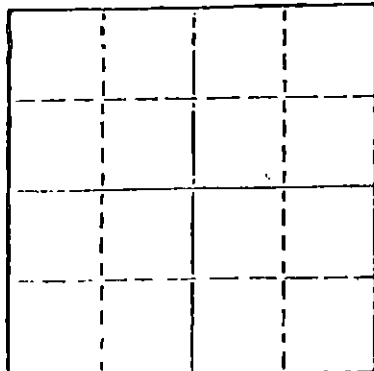

Locate well correctly on above
Section Plot

Date Well completed 19 _____
Application for plugging filed 19 _____
Application for plugging approved 19 _____
Plugging commenced 11/2/78 19 _____
Plugging completed 11/6/78 19 _____
Reason for abandonment of well or producing formation
depleted. _____

If a producing well is abandoned, date of last production 19 _____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes _____

Name of Conservation Agent who supervised plugging of this well Owens
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4575
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8-5/8 | 304 | none |
| | | | | 4 1/2" | 4573 | 3629' |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Sanded to 4,500' and ran 4 sacks cement. Shot pipe at 3710', 3620', pulled 118 joints.
Squeezed hole with 3 sacks hulls, 20 sacks gel, released plug and displaced with
125 sacks 60/40 pozmix, 2% gel and 3% cc.

PLUGGING COMPLETE.

STATE CORPORATION COMMISSION
NOV 13 1978
11-13-78
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KESLO CASING PULLING
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of November, 19 78

My commission expires _____



Margaret Melcher
Notary Public.