


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
245 North Water
Wichita, KS 67202

FORM CP-4

WELL PLUGGING RECORD

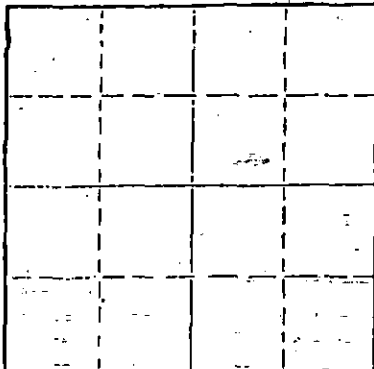

Locate well correctly on above
Section Plot

Reco _____ County. Sec. 28 Twp. 24 Rge. 5 (E) (W) X
Location as "NE/CNW/SW" or footage from lines S/2-SE/4-SE/4
Lease Owner Ronald Russ Prater, Inc.
Lease Name Freddie Yoder Well No. 1 (OWWO)
Office Address 240 N. Rock Road, Suite 235 Wichita, KS 67206
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed July 26 19 76
Application for plugging approved _____ 19____
Plugging commenced July 28 19 76
Plugging completed August 4 19 76
Reason for abandonment of well or producing formation depleted
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3402 Feet
Show depth and thickness of all water, oil and gas formations _____

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	650'	none
				4 1/2"	3399'	2,412.12'

Describe in detail the manner in which the well was plugged; indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed from _____ feet to _____ feet for each plug set.

Plugged back with sand to 3385'. Dumped 5 sacks cement.
Shot pipe @ 3020', 2900' and 2820'.
Shot pipe @ 2500' and 2400'.
Pulled a total of 61 joints of 4 1/2" casing.
Pushed a plug to 350'. Built a 15ft. rock bridge.
Plugged well with 5 yards ready-mix concrete.

RECEIVED
STATE CORPORATION COMMISSION


AUG 10 1976
8-10-76

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rockhold Engineering, Inc.
Address Box 698, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold
Box 698, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of August, 19 76
Marla K. Haslam
Marla K. Haslam Notary Public.
My commission expires May 21, 1980

DRILLERS LOG

YODER (WASHDOWN)

<u>CASING RECORD:</u>	<u>OPERATOR:</u> Ronald Russ Prater, Inc.	<u>DESCRIPTION</u>
8 5/8" set at 650' with 450 sack cement	<u>CONTRACTOR:</u> Search Drilling Company	C S/2 SE SE Sec. 28-24S-5W Reno County, Kansas
<u>TOTAL DEPTH:</u> 3402'	<u>COMMENCED:</u> November 5, 1975	
	<u>COMPLETED:</u> November 10, 1975	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Cement	0	40	
Open Hole	40	230	
Cement	230	260	
Open Hole	260	440	
Wash Open Hole	440	2400	
Wash Open Hole	2400	3093	
Lime and Shale	3093	3188	
Lime and Shale	3188	3283	
Lime	3283	3402	Ran 86 joints of 4 1/2" set at 3399' 75 sacks cement 10 salt - plug down at 2:15 PM.

RECEIVED
STATE OF KANSAS
NOV 27 1975
7-27-76
GEOLOGICAL DIVISION
TOPEKA, KANSAS

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SEARCH DRILLING COMPANY

R. M. Wendling

Subscribed and sworn to before me this 10th. day of November, 1975

My commission expires
February 19, 1977

Maxine D. Dressen
Maxine D. Dressen Notary Public

<p>MAXINE DRESSEN NOTARY PUBLIC SEDGWICK COUNTY, KANSAS MY COMM. EXP. FEB. 19, 1977</p>
--