


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH

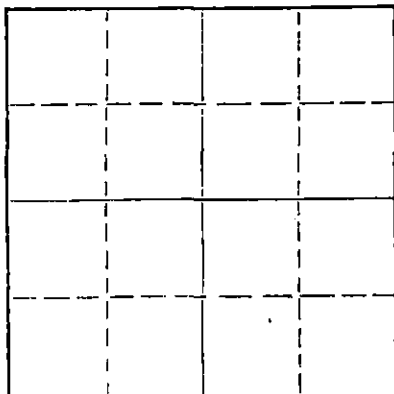

Locate well correctly on above
Section Plat

Reno County, Sec. 28 Twp 24S Rge. 5 (E) W (W)
Location as "NE/CNW%SW%" or footage from lines NE SW SE
Lease Owner Hinkle Oil Company
Lease Name Garver Well No. 1
Office Address 1016 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D&A
Date well completed August 14, 1970
Application for plugging filed August 14, 1970
Application for plugging approved August 14, 1970
Plugging commenced August 14, 1970
Plugging completed August 14, 1970
Reason for abandonment of well or producing formation D&A

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3815' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|---------|------------|
| | | | | 8 5/8" | 227.50' | -0- |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set plug @ 215' w/1/2 sx hulls,
35 sx cement. Plug @ 40' w/1/2
sx hulls, 15 sx cement.

RECEIVED
STATE CORPORATION COMMISSION
AUG 24 1970
CONSERVATION DIVISION
Wichita, Kansas


8-24-70

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF SEdgewick, ss.
Jim Farrice (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Farrice
1720 Wichita Plaza, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of August, 19 70.



Gloria Sawett

Notary Public.

DRILLERS LOG

No. 1 Carver

CASING RECORD:

10 3/4" @ 226'
w/275 ex cement

COMPANY:

Hinkle Oil Company

DESCRIPTION:

NE SW SE
28-248-SW
Reno County,
Kansas

CONTRACTOR:

Red Tiger Drilling Company

COMMENCED:

August 1, 1970

COMPLETED:

August 14, 1970

TOTAL DEPTH: 3815'

ELEVATION:

| FORMATION | FROM | TO | REMARKS |
|------------------------|------|------|---------|
| Surf. Soil, Clay, Sand | 0 | 45 | |
| Red Bed | 45 | 129 | |
| Gyp., Anhydrite | 129 | 130 | |
| Shale & Shells | 130 | 229 | |
| Shale & Shells, Salt | 229 | 635 | |
| Lime & Shale | 635 | 1590 | |
| Lime | 1590 | 1815 | |
| Lime & Shale | 1815 | 2265 | |
| Lime | 2265 | 2540 | |
| Douglas Section | 2540 | 2686 | |
| L.K.C. | 2686 | 2725 | |
| Lime | 2725 | 3125 | |
| Lime & Shale | 3125 | 3291 | |
| Shale | 3291 | 3315 | |
| Lime & Shale & Miss | 3315 | 3405 | |
| Miss. | 3405 | 3420 | |
| Miss., Lime & Shale | 3420 | 3480 | |
| Lime & Chert | 3480 | 3520 | |
| Miss. Cherty Lime | 3520 | 3560 | |
| Cherty Lime | 3560 | 3645 | |
| KNK | 3645 | 3795 | |
| Viola | 3795 | 3806 | |
| Lime & Sand | 3806 | 3815 | |


I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Jim Farrice
Jim Farrice

Subscribed and sworn to before me this 17th day of August, 1970.

Gloria Sawcette
Notary Public



Notary Commission Expires:
October 25, 1972

RECEIVED
STATE CORPORATION COMMISSION
AUG 24 1970 8-24-70
CONSERVATION DIVISION
Wichita, Kansas