

TO:

STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-101-20816-00-01

Spot: NWNESW Sec/Twnshp/Rge: 8-17S-29W

2288 feet from S Section Line, 3606 feet from E Section Line

Lease Name: SNIDER O.W.W.O

Well #: 1-8

County: LANE

Total Vertical Depth: 4625 feet

Operator License No.: 6039

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4622	0	WITH 625 SX CMT
SURF	8.625	472		WITH 235 SX CMT

Op Name: L. D. DRILLING, INC.

Address: 7 SW 26TH AVE  
GREAT BEND, KS 67530

Well Type: DH

UIC Docket No:

Date/Time to Plug: 11/10/2015 1:00 PM

Plug Co. License No.: 99977

Plug Co. Name: QUALITY OIL WELL CEMENTING

Proposal Recvd. from: GERALD WALKER

Company: L.D. DRILLING

Phone: (620) 793-3051

Proposed Plugging Method: BULLHEAD 30 SX CMT WITH 200# HULLS. MUD SPACER TO 2210'. CMT TO 0'. CHECK BACKSIDE.

Plugging Proposal Received By: ERIC MACLAREN

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 11/10/2015 2:30 PM

KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 30 SX CMT WITH 150# HULLS TO 4445'. PUMP 20 BBL SPACER BACK TO 2450'. PUMP 150 SX CMT FROM 2450' TO 0'. PRESSURE TO 400#. HOLDING. PUMP 20 SX CMT DOWN THE ANNULUS TO 200#. TOP OFF 4 1/2" WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4442	4445		

KCC WICHITA  
NOV 23 2015  
RECEIVED

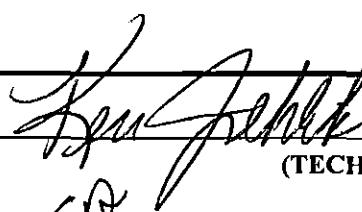
Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY.

Plugged through: CSG

CKM 12/2/15

District: 01

Signed

  
(TECHNICIAN)

RECEIVED  
NOV 16 2015  
KCC DODGE CITY  
