


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

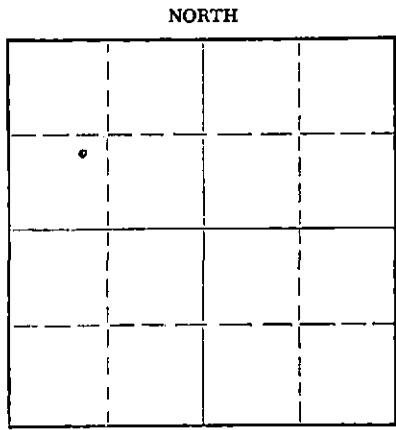

Locate well correctly on above Section Plat

Stafford County. Sec. 1 Twp. 25 Rge. (E) 15 (W)
Location as "NE/CNW/SW" or footage from lines C NE SW NW
Lease Owner Rosen Oil Company
Lease Name Reese Well No. 3
Office Address 260 Sutton Place, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed _____ 19____
Application for plugging filed December 1 19 69
Application for plugging approved _____ 19____
Plugging commenced December 1 19 69
Plugging completed December 9 19 69
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Ralph Warren
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4443 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	294'	8 5/8"	294'	none
		0	4440'	5 1/2"	4440'	3026.70

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 4100' and dumped 5 sacks of cement.
Squeezed well with 15 sacks gel mud and 75 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
DEC 29 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor PIPE PULLERS, INC.
Address Box 486, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Evelyn Roth (employee of owner) or (~~owner or operator~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of December, 19 69

My commission expires Feb. 10, 1971
George A. Meyer Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

COPY


15-185-10332-0000

SEC. 1 T. 25 R.15W
NE SW NW

Company- GULF OIL COMPANY
Farm- Lynn Reese No. 3

Total Depth. 4443'
Comm. 1-2-61 Comp. 1-16-61
Shot or Treated.
Contractor, Sierra Petr. Co.
Issued. 6-3-61

County Stafford
KANSAS



CASING:
8 5/8" 292.52' cem w/180 sx.
5 1/2" 4440' cem w/200 sx.

Elevation. 2022' KB

Production. 36 BOPD

Figures indicate Bottom of Formations.

sand & gravel	165
shale & shells	295
shale & red bed	960
Anhydrite	980
shale & shells	1340
salt:	1465
shale & shells	1735
shale & lime	3752
lime	4031
lime & shale	4267
lime	4310
Viola	4397
Simpson	4439
Arbuckle	4443
Total Depth	

TOPS:	
Anhydrite	960
Heebner	3595
Toronto	3615
Douglas	3634
Brown Lime	3751
Lansing-Kansas City	3758
Base Kansas City	4024
Mississippi	4159
Kinderhook	4204
Viola	4270
Simpson (scout)	4372
Simpson Sand (scout)	4394
Arbuckle	4443

RECEIVED
STATE CORPORATION COMMISSION
- DEC 1 1 1969
CONSERVATION DIVISION
Wichita, Kansas