


15-185-20486-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

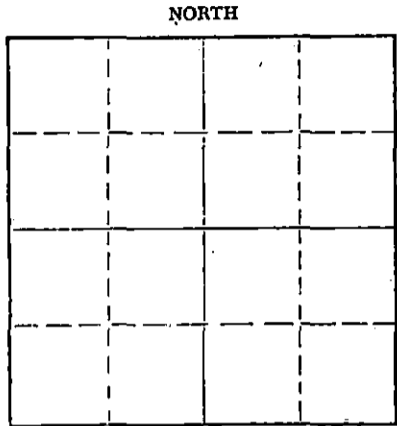

Locate well correctly on above
Section Plat

Stafford County. Sec. 14 Twp. 25S Rge. 15W (E) (W)
Location as "NE/CNW/SW" or footage from lines SE NW NW
Lease Owner Dunne-Gardner Petroleum, Inc.
Lease Name Wilson "B" Well No. 1
Office Address Suite 250, 200 West Douglas, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 3-6 19 74
Application for plugging filed 3-6 19 74
Application for plugging approved 3-6 19 74
Plugging commenced 3-6 19 74
Plugging completed 3-6 19 74
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4300 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	285'	-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud to 250, 35 sacks cement
Mud to 40', plug, 1/4 sack hulls, 13 sacks cement
2 sacks cement in rathole

RECEIVED
STATE CORPORATION COMMISSION
MAR 12 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sun Oilwell Cementing, Inc.
Address Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Don Gardner (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Suite 250, 200 West Douglas, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of March, 19 74

My commission expires December 14, 1977 March Day Notary Public.

DRILLERS LOG

#1 WILSON "B"
SE NW NW Section 14-25S-15W
Stafford County, Kansas

OPERATOR - CONTRACTOR: Dunne-Gardner Petroleum, Inc.
Suite 250, 200 West Douglas
Wichita, Kansas 67202

COMMENCED: February 22, 1974

COMPLETED: March 6, 1974

CASING RECORD: 8-5/8" @ 285' w/250 sx

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	285	Sand, blue shale
285	965	Shale
965	980	Anhydrite
980	1350	Shale
1350	1900	Shale and shells
1900	1996	Shale
1996	3692	Lime and shale
3692	4031	Lime
4031	4070	Lime and shale
4070	4263	Lime
4263	4300	Shale and lime
4300		Rotary total depth

RECEIVED
STATE CORPORATION COMMISSION
MAR 12 1974
CONSERVATION DIVISION
Wichita, Kansas


STATE OF KANSAS)
) ss
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log to the best of my knowledge and belief.


Don Gardner

Subscribed and sworn to before me this 11th day of March, 1974.

My commission expires:
December 14, 1977


Notary Public