

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
300 Colorado Derby Building
Wichita, Kansas 67202

FORM CP-1
Rev. 03/84

15-185-19203-20-21

WELL PLUGGING APPLICATION FORM
(PLEASE TYPE FORM and File ONE Copy)

API # 12-11-58 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date. 2/95

WELL OPERATOR Redstone Oil & Gas Company KCC LICENSE # 30040
(owner/company name) (operator's)

ADDRESS 8235 Douglas Ave. Suite 1050 CITY Dallas

STATE Texas ZIP CODE 75225 CONTACT PHONE # (214) 368-0202

LEASE Wilson WELL# B-1 SEC. 11 T. 25-S R. 15 (East/West)

C -S 1/2 SW - NE SPOT LOCATION/QCQC COUNTY Stafford

2970 FEET (in exact footage) FROM ⑤/W (circle one) LINE OF SECTION (NOT Lease Line)

1650 FEET (in exact footage) FROM ⑤/W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL ☐ GAS WELL ☐ DEA ☐ SWD/ENHR WELL ☒ DOCKET# E-17-842

CONDUCTOR CASING SIZE SET AT CEMENTED WITH SACKS

SURFACE CASING SIZE 8 5/8 SET AT 323 CEMENTED WITH 225 SACKS

PRODUCTION CASING SIZE 5 1/2 SET AT 4259' CEMENTED WITH 185 SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: Mississippi 4222 1/2 - 48 1/2 Bridge Plug 4144'
Ft. Riley 2220' - 90'

ELEVATION 2020 1/2 2025 T.D. 4260 PETD 2340 ANHYDRITE DEPTH N/A
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD ☐ POOR ☒ CASING LEAK ☐ JUNK IN HOLE ☐

PROPOSED METHOD OF PLUGGING According to the rules and regulations of the

State of Kansas. See Attached Sheet & Schematic

(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? Yes IS ACO-1 FILED? N/A

If not explain why?

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Wayne Roberts PHONE# (405) 254-9198

ADDRESS P. O. Box 278 City/State Woodward, Oklahoma

PLUGGING CONTRACTOR Chase Well Service KCC LICENSE # 6123

ADDRESS P. O. Box 355 Great Bend, Kansas PHONE # (316) 793-9556
(company name) (operator's)

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) ASAP

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 3-04-94 AUTHORIZED OPERATOR/AGENT: Wayne Roberts
(signature)

REDSTONE



OIL & GAS COMPANY

March 04, 1994

State Of Kansas
State Corporation Commission
Conservation Division
Wichita, Kansas 67202

REF: Proposal for Plugging Well

Dear Sir:

Redstone Oil & Gas Company purposes to pull Tubing and Packer. Run in hole with wireline and set cast iron bridge plug at 2140', above squeeze perforation @ 2150 & injection perforations at 2220' - 90'. Test 5 1/2" casing to 1000 PSI. Run in hole with 2 3/8" tubing and displace 5 1/2" casing with 9 lbs. per gallon, 36 viscosity mud spotting cement plug from 2140' to 2000' 1500' - 1400' 1100' - 900' 200' - 5'. Pump 100 sacks down 8 5/8 casing. Cut all casing off 5' below surface and cap.

Sincerely,

REDSTONE OIL & GAS COMPANY

Wayne Roberts
Operation Superintendent
of Drilling, Completion & Workover

/ln

RECEIVED
STATE CORPORATION COMMISSION

MAR 11 1994


CONSERVATION DIVISION
Wichita, Kansas

PO. BOX 278
WOODWARD, OKLAHOMA 73802

(405) 254-9198
FAX (405) 254-3342

GL: 2020'
KB: 2025'

LEASE NAME : Wilson B #1
LOCATION : C S/2 SW NE
SEC 11 T25S-R15W
COUNTY : Stafford
STATE : Kansas

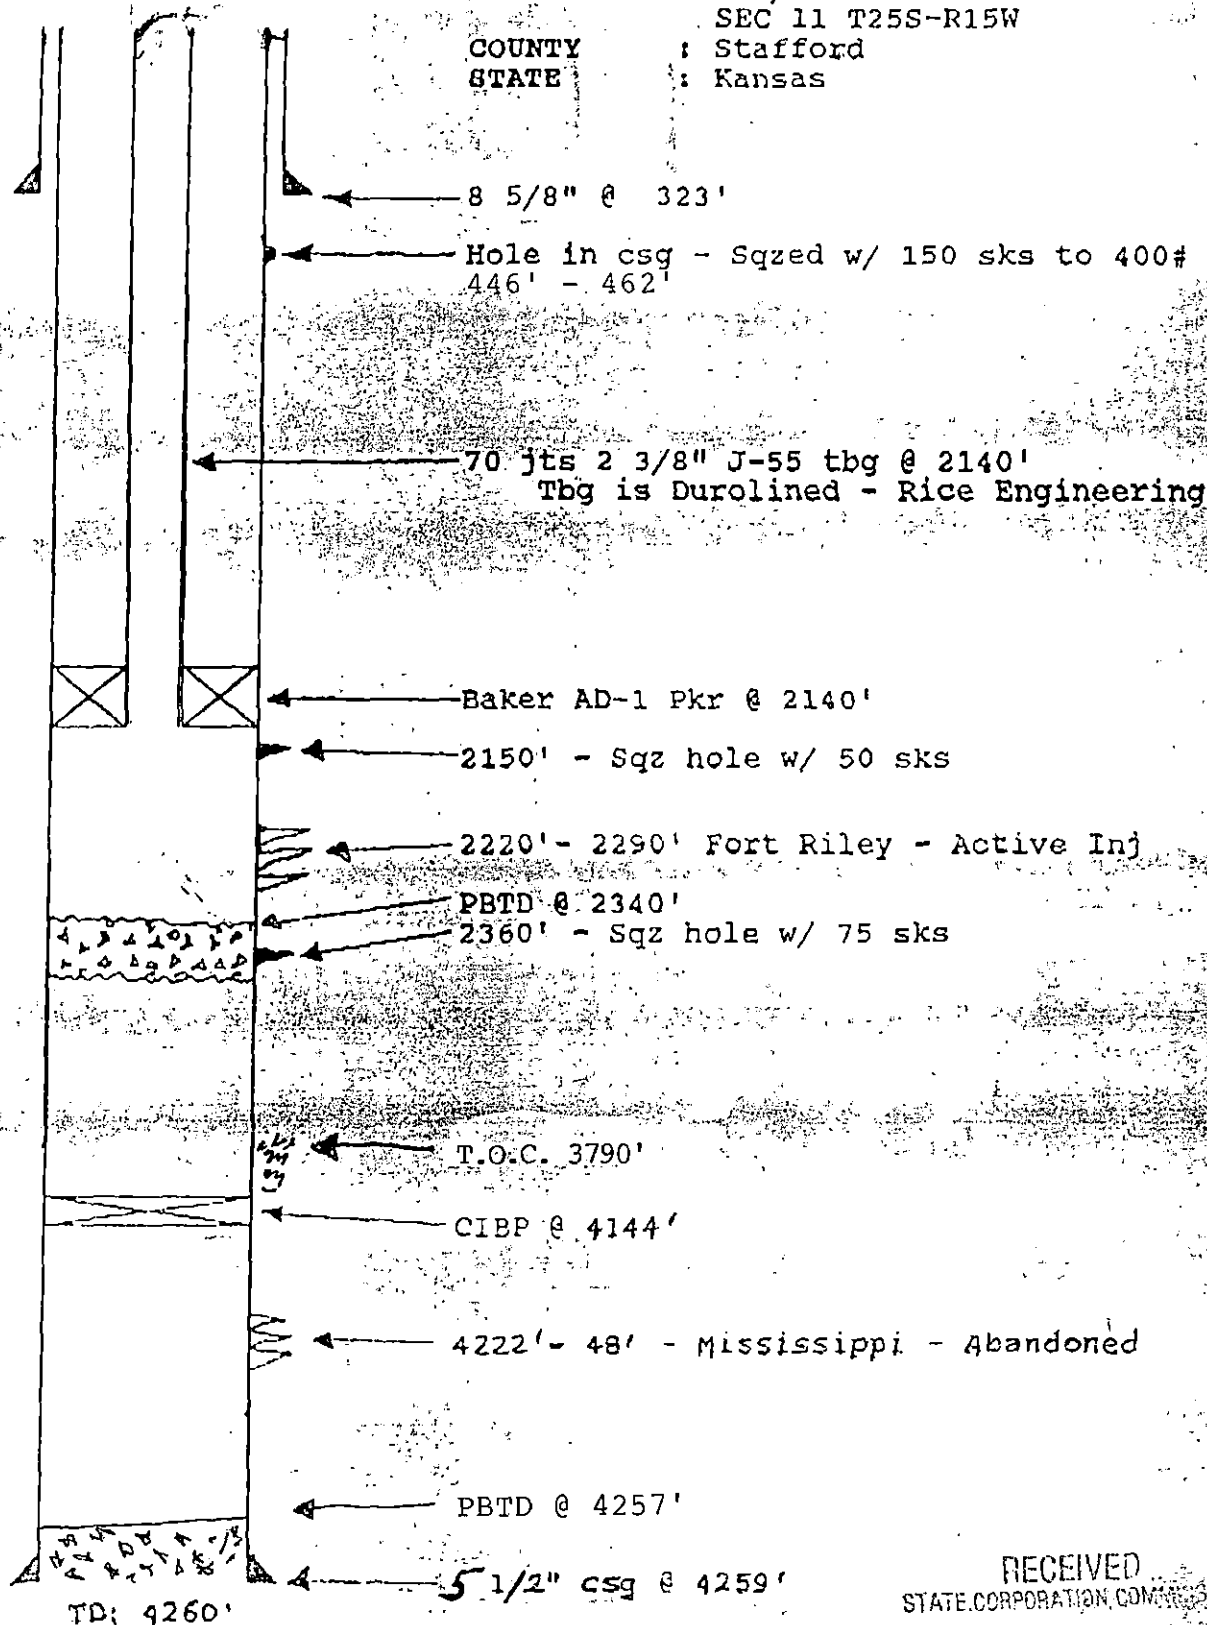

RECEIVED
STATE CORPORATION COMMISSION

MAR 11 1994

CONSERVATION DIVISION
Wichita Kansas

WELEX



RADIOACTIVITY LOG

COMPANY GILEAD OIL & GAS CO
 WELL WILSON "B" # 1
 FIELD GRUNDER
 County STAFFORD
 State KANSAS
 File _____

COMPANY GILEAD OIL & GAS COMPANY

WELL WILSON "B" # 1

FIELD GRUNDER

COUNTY STAFFORD STATE KANSAS

Location

C OF S $\frac{1}{2}$ OF SW NE

Sec. 11 Twp. 25S Rge. 15W

Other Logs

Elevation

KB. 2025'

DF. _____

GL. 2020 $\frac{1}{2}$ '

Permanent Datum ROTARY SURFING Elev. 2025'

Log Measured From 4 $\frac{1}{2}$ ' ABOVE GROUND LEVEL

Drilling Measured From 4 $\frac{1}{2}$ ' ABOVE GROUND LEVEL

Type Log	GAMMA	NEUTRON	SCATTERED GAMMA
Run No.	ONE	ONE	ONE
Date	1-5-59	1-5-59	1-5-59
Total Depth Driller	4260'	4260'	4260'
Present Depth Driller	4256'	4256'	4256'
Total Depth Welex	4257'	4257'	4257'
Survey Begins	4255 $\frac{1}{2}$ '	4257'	4255 $\frac{1}{2}$ '
Survey Ends	0	0	3600'
Mud Data			
Type Fluid in Hole	WATER		
Salinity PPM Cl			
Weight lb./gal.	8.3		
Fluid Level	4251'		
Max. Hole Temp.	126°		
Recorded By	W. EDWARDS		
Witnessed By	MR. WIGGINS & MR. GILL		

BORE HOLE RECORD				CASING RECORD			
Run	Bit	From	To	Size	Wgt.	From	To
ONE	12-1/4"	323'	0	8-5/8"		323'	0
	7-7/8"	4260'	323'	5-1/2"		4260'	0

RECEIVED
 MAR 11 1994
 CONSERVATION DIVISION
 Wichita, Kansas



Kansas Corporation Commission

Joan Finney, Governor Jim Robinson, Chairman F.S. Jack Alexander, Commissioner Rachel C. Lipman, Commissioner
Judith McConnell, Executive Director Brian Moline, General Counsel

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

March 11, 1994

Redstone Oil & Gas Company
8235 Douglas Ave Suite 1050
Dallas TX 75225

Wilson B-1
API 15-N/A
2970 FSL 1650 FEL
Sec. 11-25S-15W
Stafford County

Dear Wayne Roberts,

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least at five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely,

David P. Williams
Production Supervisor

District: #1
304 W. McArtor
Dodge City KS 67801
(316) 225-6760