


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 Give All Information Completely
 Make Required Affidavit
 Mail or Deliver Report to:
 Conservation Division
 State Corporation Commission
 800 Bittling Building
 Wichita, Kansas

15-185-0018-0000
WELL PLUGGING RECORD

NORTH

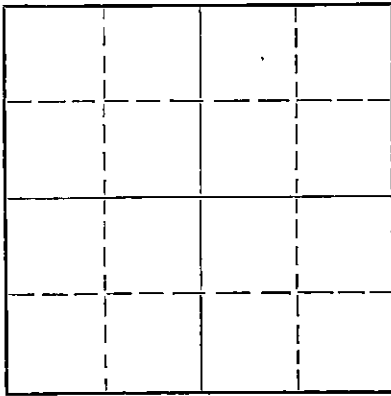

Locate well correctly on above
 Section Plat

Stafford County, Sec. 13 Twp. 25 Rge. 15 (E) W (W)
 Location as "NE/CNW/SW" or footage from lines SW SW NE
 Lease Owner Trans Era Petroleum, Inc.
 Lease Name Wilson "B" Well No. 1
 Office Address Russell, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) Dry
 Date well completed 11/14/53 19
 Application for plugging filed 11/13/53 19
 Application for plugging approved 11/13/53 19
 Plugging commenced 11/14/53 19
 Plugging completed 11/14/53 19
 Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4640 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	257	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGING RECORD

Filled hole with heavy mud to 240', set wooden plug at 240' with 15 sacks of cement mixed and run through drill pipe. Filled hole with heavy mud to 40', set wooden plug at 40' with 10 sacks of cement.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor _____
 Address _____

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
H. R. Michaelis (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. R. Michaelis
Russell, Kansas
 (Address)

SUBSCRIBED AND SWORN to before me this 23rd day of November, 1953

My commission expires 1-30-57 Margie Cooper Notary Public.



11-25-53

Trans Era Petroleum, Inc.
Wilson "B" #1

SW SW NE 13-25-15
Stafford County, Kansas

Total Depth: 4640'
Comm. 10/29/53
Comp. 11/14/53

Casing

Cement

8 5/8" Set @ 257'

200 sacks of Lehigh

Formation	Depth
Sand-gravel-sand	95
Sand	210
Shale-shells	257
Sand	276
Red bed	950
Anhydrite	990
Shale	1275
Shale-shells	1750
Shale	1850
Lime-shale	1975
Lime	2240
Lime-shale	3647
Lime	3740
Lime-shale	3750
Shale	3845
Lime	4267
Cherty Conglomerate	4277
Lime	4373
Shale-chert-lime	4400
Shale-chert	4527
Lime-chert-shale	4545
Shale-sand-lime	4605
Lime	4640'

STATE OF KANSAS)
) ss
RUSSELL COUNTY)

I hereby certify that the above information is true and correct to the best of my knowledge.

Cora Betz

Subscribed and sworn to before me this 23rd day of November, 1953.

Margie Cooper
Notary Public

My commission expires: 1-30-57.

PLUGGING
FILE SEC 13 T 25 R 15W
BOOK PAGE 143 LINE 17

11-25-53