


15-047-20938-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

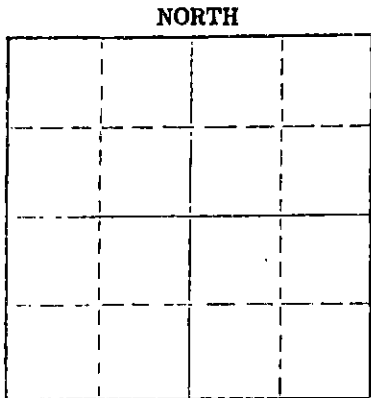

Locate well correctly on above Section Plot

Edwards County. Sec. 2 Twp. 25S Rge. 16W (W)
Location as "NE/CNW&SW" or footage from lines 150' N of C NE NW
Lease Owner Zenith Drilling Corporation, Inc.
Lease Name Wilson #2 Well No. 2
Office Address 200 West Douglas, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 11, 1977 19
Application for plugging filed February 11, 1977 19
Application for plugging approved February 11, 1977 19
Plugging commenced 7:00 AM, February 11, 1977 19
Plugging completed 8:00 AM, February 11, 1977 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 1359' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	RECEIVED CORPORATION	MISSION		8 5/8"	253'	None
	FEB 18 1977	2-18-77				
	CONSERVATION DIVISION WICHITA, KANSAS					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud.
Pumped through Openend of drill pipe
50 sacks at 500' and 25 Sacks at 240'.
Filled hole to 40'. Solid Bridge with plug and
1/4 sack Hulls and 10 sacks to surface.
2 sacks in rathold - Used 50/50 Pozmix
with 2% gel.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor STERLING DRILLING COMPANY
Address P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE, KS.
Bernard Laudermilk (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) Bernard Laudermilk
Bernard Laudermilk, President
P. O. Box 129, Sterling, Kansas 67579
(Address)

Subscribed and sworn to before me this 11th day of February, 1977

CHARLES HALL—NOTARY PUBLIC
My Commission Expires Jan. 6, 1978

Charles M. Hall,
Notary Public.



STERLING DRILLING COMPANY
 P. O. Box 129
 Sterling, Kansas 67579

WELL LOG ----- WILSON #2
 Located: 150' N of C NE NW, Section 2-258-16W, Edwards
 County, Kansas

OWNER: Zenith Drilling Corporation, Inc.
 ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: February 4, 1977
 COMPLETED: February 11, 1977

TOTAL DEPTH: 4359'

LOG

CASING RECORD

0 - 200 Clsy and Sand
 200 - 256 Shale
 256 - 470 Shale, Sand and Red Bed
 470 - 1061 Red Bed and Sand.
 1061 - 1076 Anhydrite
 1076 - 1300 Red Bed, Shale, Shells
 1300 - 1980 Shale - Lm. Stg.
 1980 - 4015 Lime and Shale
 4015 - 4215 Lime
 4215 - 4270 Lime w/Chert, Shale and Sand
 4270 - 4340 Conglomerate
 4340 - 4359 Lime

Ran 6 joints new 23#, 8 5/8" casing,
 241.83' set at 253' K.D. with 225
 sacks 60/40 Pozmix with 3% cc. Plug
 down at 9:00 PM, 2-4-77, by Howco.

Plugged.

RECEIVED
 SURFACE MINING COMMISSION

FEB 13 1977

CLERK DIVISION
 WICHITA, KANSAS

2-18-77