


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Ford County, Sec. 22 Twp. 26S Rge. 24W (E) (W)  
Location as "NE/CNW/SW" or footage from lines C SW NW  
Lease Owner Cleary Petroleum Corporation  
Lease Name Schmidt Well No. 1-22  
Office Address 310 Kermac Bldg., Oklahoma City, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed January 6 1969  
Application for plugging filed January 6 1969  
Application for plugging approved January 6 1969  
Plugging commenced January 6 1969  
Plugging completed January 6 1969  
Reason for abandonment of well or producing formation Dry Hole

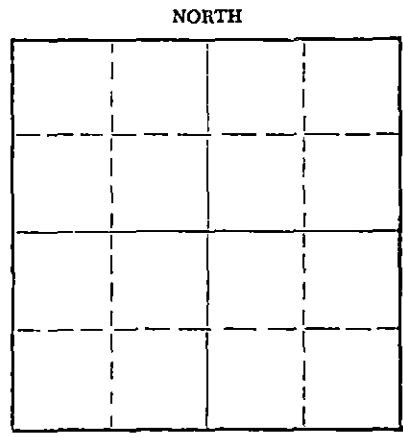

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eves - Santanta  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 5195 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	533'	8 5/8"	533'	None

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 9 1969  
CONSERVATION DIVISION  
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.


Pump Truck - Plugged with 50 sacks,  
Followed by 20 barrels mud & 15 sacks cement.  
Standing pressure 300#, completed 11:00 A.M. 1-6-69

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Hellar Drilling Company, Inc.  
Address 339 Union Center Bldg., Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
D. L. Hellar, Pres. of Hellar Drlg. Co. Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) D. L. Hellar, D. L. Hellar, President  
339 Union Center Bldg., Wichita, Kansas 67202  
(Address)

SWORN TO before me this 7th day of January, 1969



Elaine Reichenberger  
Notary Public.

15-057-20011-0000

DRILLER'S LOG

COMPANY: Cleary Petroleum Corporation  
 CONTRACTOR: Hellar Drilling Company, Inc.  
 LEASE: #1-22 Schmidt  
 LOCATION: C SW NW 22-26S-24W Ford County, Kansas  
 COMMENCED: 12-19-68  
 COMPLETED: 1-6-69  
 CASING: Set 8 5/8" surface csg. @ 533'  
 W/375 sacks cement

0 - 530	Sand & Shale
530 - 536	Shale
536 - 1088	Shale & Redbed
1088 - 1636	Shells - Shale & Redbed
1636 - 1699	Anhydrite
1699 - 1700	Shale & Shells
1700 - 2464	Shale
2464 - 2623	Salt Section
2623 - 2975	Lime
2975 - 4432	Lime & Shale
4432 - 5029	Lime
5029 - 5195	Lime & Chert
5195	Rotary Total Depth
	Dry and Abandoned

RECEIVED  
 STATE CORPORATION COMMISSION  
 JAN 9 1969  
 CONSERVATION DIVISION  
 Wichita, Kansas

STATE OF KANSAS     )  
                           ) SS  
 COUNTY OF SEDGWICK )

I, D. L. Hellar, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1-22 Schmidt, located in C SW NW Section 22-26S-24W Ford County, Kansas, as reflected by the files of the Hellar Drilling Company, Inc.

HELLAR DRILLING COMPANY, INC.

By *D. L. Hellar*  
 D. L. Hellar - President



Subscribed and sworn to before me, a Notary Public, in and for the State of Kansas, this 7th day of January, 1969.

My Commission expires: November 16, 1971.

*Elaine Reichenberger*  
 Elaine Reichenberger - Notary Public