

15-057-20082-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Ford County, Sec. 22 Twp. 26S Rge. 24W (E) (W)

Location as "NE/CNW&SW" or footage from lines. C NE SE
Lease Owner Icer Addis
Lease Name Maxwell Well No. 1
Office Address P. O. Drawer 8038, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 9 19 75
Application for plugging filed September 9 19 75
Application for plugging approved September 9 19 75
Plugging commenced September 9 19 75
Plugging completed September 9 19 75
Reason for abandonment of well or producing formation Dry Hole

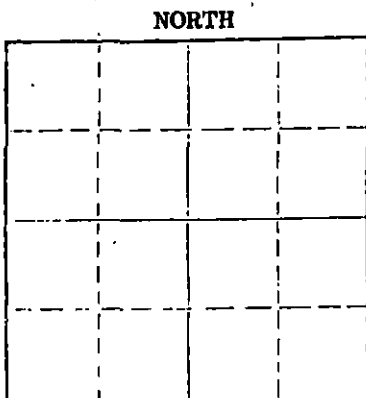

Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes, verbally

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation Depth to top Bottom Total Depth of Well 5200
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	514	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- 1st plug set at 900' with 50 sacks
- 2nd plug set at 500' with 35 sacks
- 3rd plug set at 40' with 15 sacks, 2 sacks in rathole

9-24-75

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Union Drilling Co., Inc.
Address 505 Union Center, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK
R. D. Messinger (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. D. Messinger
505 Union Center, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 12th day of September 19 75

July 29, 1978

Donna F. Brown
Donna F. Brown Notary Public.

My commission expires



CONTRACTOR'S WELL LOG

15-57-20082-0000

OPERATOR: Icer Addis
 CONTRACTOR: Union Drilling Co., Inc.
 WELL NAME: Maxwell #1
 LOCATION: C NE SE Section 22-26S-24W
 Ford County, Kansas
 COMMENCED: August 23, 1975
 COMPLETED: September 9, 1975

0	514	Shale and shells	
514	984	Shale	8-5/8" casing set at 514' w/150 sacks
984	1860	Shale and shells	common, 2% gel, 3% Ca.Cl., and 170 sacks
1860	2312	Lime and shale	60-40 posmix
2312	2712	Shale	
2712	4184	Lime and shale	
4184	4469	Lime	
4469	4528	Lime and shale	
4528	4622	Lime	
4622	4631	Lime and shale	
4631	4700	Lime	
4700	4750	Lime and shale	
4750	4975	Lime	
4975	5000	Lime and shale	
5000	5010	Lime	
5010	5074	Lime and shale	
5074	5200	Lime	
5200		T. D.	

9/24/75

We certify that the above and foregoing is a true and correct copy of the log on the #1 Maxwell, C NE SE Section 22-26S-24W, Ford County, Kansas.

UNION DRILLING CO., INC.

R. D. Messinger
 R. D. Messinger

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Subscribed and sworn to before me, a Notary Public in and for the aforesaid county and state as of this 12th day of September, 1975.

Donna F. Brown
 Donna F. Brown - Notary Public

My commission expires:
 July 29, 1978

