

15-185-20639-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Stafford County, Sec. 3 Twp. 25S Rge. 15W (E) (W)

Location as "NE/CNW/SW" or footage from lines SW NW NW

Lease Owner Dunne-Gardner Petroleum, Inc.

Lease Name Barstow Well No. 1

Office Address Suite 250, 200 W. Douglas, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed February 7, 1976


Application for plugging filed February 7, 1976

Application for plugging approved February 7, 1976

Plugging commenced February 7, 1976

Plugging completed February 7, 1976

Reason for abandonment of well or producing formation Dry Hole

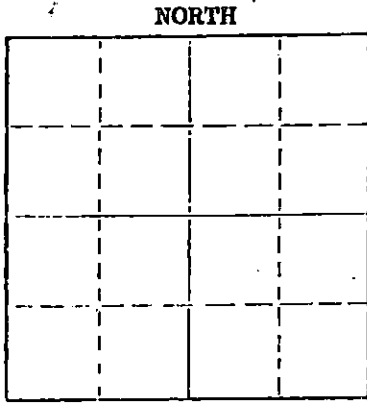

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Bieberstein

Producing formation Depth to top Bottom Total Depth of Well 4454 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	260'	-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud to 250', 35 sacks cement
Mud to 40', plug, 1/4 sack hulls, 15 sacks cement
5 sacks in rathole

STATE CORPORATION COMMISSION

FEB 13 1976

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor 2-13-76

Address

STATE OF KANSAS COUNTY OF SEDGWICK ss. Don Gardner

(owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Suite 250, 200 W. Douglas, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of February 1976

My commission expires March 1, 1978

Notary Public

15-185-20639-0000

DRILLERS LOG

#1 BARSTOW
SW NW NW Sec. 3-25S-15W
Stafford County, Kansas

OPERATOR: Dunne-Gardner Petroleum, Inc.
Suite 250, 200 West Douglas
Wichita, Kansas 67202

CONTRACTOR: Dunne-Gardner Petroleum, Inc.
Suite 250, 200 West Douglas
Wichita, Kansas 67202

COMMENCED: January 26, 1976

COMPLETED: February 7, 1976

CASING RECORD: 8-5/8" @ 260' w/225 sx

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	160	Sand
160	260	Shale
260	480	Sand
480	813	Red bed
813	998	Shale
998	1020	Anhydrite
1020	1700	Shale and shells
1700	2610	Shale and lime
2610	2750	Lime
2750	2855	Lime and shale
2855	2970	Lime
2970	3275	Lime and shale
3275	3453	Lime
3453	3742	Lime and shale
3742	3922	Lime
3922	4000	Lime and shale
4000	4313	Lime
4313	4355	Lime and chert
4355	4454	Lime
4454		Rotary total depth

RECEIVED
STATE CORPORATION COMMISSION

FEB 13 1976
2-13-76
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) ss
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log to the best of my knowledge and belief.


Don Gardner

Subscribed and sworn to before me this 10th day of February, 1976.

My commission expires:
March 1, 1978


Notary Public