

15-047-30063-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division,
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Edwards County, Sec. 26 Twp. 26 Rge. 18 (E) (W)

Location as "NE/CNW/SE/SW" or footage from lines C NW NE
Lease Owner Northern Pump Company
Lease Name Mc Clanahan Ellinhouse Well No. _____
Office Address Garden City, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 10/29/70 _____ 19____
Plugging completed 11/2/70 _____ 19____
Reason for abandonment of well or producing formation depleted

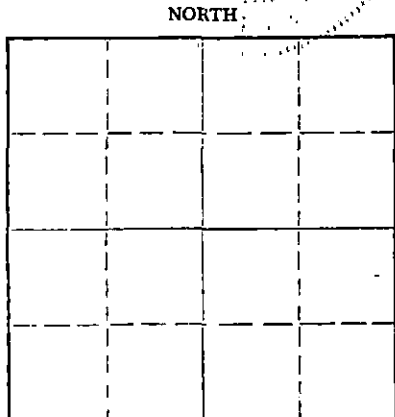

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3283 Feet
Show depth and thickness of all water, oil and gas formations. 3283

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	289	none
				4 1/2"	3283'	2431'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3255', ran sand to 3200' and ran 4 sacks of cement.
Loaded hole, checked hole to 2600', shot pipe at 2518', 2430', pulled 71 joints. Bailed hole to 340', set 10' rock bridge and ran 5 yards concrete.

PLUGGING COMPLETE.


RECEIVED
STATE CORPORATION COMMISSION
DEC 1 - 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, SS.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of November, 19 70



Margaret Melches
Notary Public.

My commission expires 2/15/71

15-047-30063-0000

DRILLER'S LOG

COMPANY
CONTRACTOR
FARM
LOCATION

Northern Pump Company
LELEN DRILLING, INC.
MC CLANAHAN-ELLINGHAUS #1
C NW NE Sec. 26-26s-18w
EDWARDS COUNTY, KANSAS
10-15-66
10-22-66

COMMENCED
COMPLETED

0	230	Sand
230	292	Shale
292	890	Shale and Red Bed
890	1185	Red bed
1185	1213	Anhydrite
1213	1550	Red Bed & Shale
1550	2080	Shale and Shells
2080	2370	Shale and Lime
2370	3112	Lime and Shale
3112	3283	Shale and Lime
	3283	RID - Set 4 1/2" Csg.

RECEIVED
STATE CORPORATION COMMISSION
OCT 13 1970
CONSERVATION DIVISION
Wichita, Kansas

Set 8 5/8" Used Surface Casing @ 292' with 250 sacks common cement
2% cc. Cement did not circulate found cement at bottom of cellar.

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the McClanahan-Ellinghaus #1 well, located C NW NE of Section 26, Township 26 South, Range 18 West, Edwards County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite
Leslie Kite

STATE OF KANSAS)
) SS
COUNTY OF BARTON)

Subscribed and sworn to before me, a Notary Public, in and for Barton County, Kansas, this 25th day of October, 1966.

Ulanda Nichols
Ulanda Nichols

My Commission Expires - April 1, 1967