


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

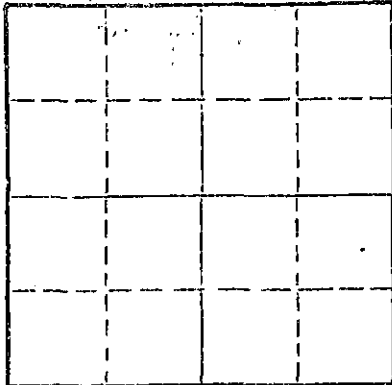

Locate well correctly on above  
Section Plat

Hodgeman County, Sec. 25 Twp. 24 Rge 23 (E) (W) X  
Location as "NE/CNW/SE/SW" or footage from lines C SW NE

Lease Owner Jack Bowles  
Lease Name Ryan Well No. #3  
Office Address Local Federal Bldg. 203 Park Ave. Oklahoma City, Okla.  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 6-13-74 19  
Plugging completed 6-17-74 19  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves  
Producing formation Depth to top Bottom Total Depth of Well 4880' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	4874'	2712.95'
				8 5/8"	365'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 4600'. Mixed and ran 5 sacks cement thru dump bailer.  
Pump 3 sacks hulls - 12 sacks gel - 70 sacks cement - 3 sacks gel - 30 sacks cement 5 sacks gel and 10 sacks cement to base of cellar.

6-18-74

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 18 1974  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec  
Box 364 Great Bend, Kansas  
(Address)

Subscribed and sworn to before me this 17 day of June, 1974



Sidney D. Miller  
Notary Public.

15-083-20317-0000

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 13 1974  
CONSERVATION DIVISION  
Wichita, Kansas

August 15, 1973

DRILLERS LOG

Re: #3 Ryan  
C SW NE, Sec. 25-24S-23W  
Hodgeman County, Kansas

OPERATOR: Jack Bowles  
CONTRACTOR: B & B Drilling, Inc.  
COMMENCED: August 2, 1973  
COMPLETED: August 13, 1973

8 5/8" @ 365' w/225 ex.

0	94	Surface Clay
94	365	Surface Sand & Shale
365	560	Shale & Shells
560	650	Sand
650	885	Shale & Shells
885	1527	Shale & Sand
1527	1559	Anhydrite
1559	1945	Shale
1945	2324	Shale w/Lime Streaks
2324	4300	Shale & Lime
4300	4515	Lime
4515	4590	Lime & Shale
4590	4740	Lime
4740	4845	Lime & Shale
4845	4880	Lime
4880		RTD

DST #1 4710-4740

5 1/2" @ 4874' w/150 ex.

We certify that the above and foregoing is a true and correct copy of the log on the #3 Ryan, located in Hodgeman County, Kansas.

B & B DRILLING, INC.

Bill Lahar  
Bill Lahar

Subscribed and sworn to before me this 15th day of August, 1973.

Betty M. Maloney  
Betty M. Maloney Notary Public

My Commission Expires: 1-29-77