



JOHN ANDERSON, Jr. Governor
 RICHARD C. BYRD Chairman
 ALVIN F. GRAUERHOLZ Commissioner
 HARRY G. WILES Commissioner
 RAYMOND B. HARVEY Secretary
 CHARLES C. McCARTER Gen. Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
 500 Insurance Bldg. 212 N. Market
 WICHITA, KANSAS

VERBAL PERMIT FORM
 (To Be Filed By Plugging Agent)

RECEIVED
 STATE CORPORATION COMMISSION
 7-17-64
 JUL 17 1964

J. P. Roberts
 Assistant Director
 500 Insurance Building
 212 North Market
 Wichita 2, Kansas

CONSERVATION DIVISION
 Wichita, Kansas

Dear Sir:

Mr. Sargent of Texaco Inc. has this

date requested permission to plug the following described well:

Mr. Sargent guarantees payment of the plugging fee.

Operator's full Name: Texaco Inc.

Complete Address: 614 Bitting Bldg. Wichita, Kansas

Lease Name: Foreman-Trust Unit Well No. # 1

Location: C NW SE Sec. 23 Twp. 24 Rge. (E) (W) 39

County Hamilton Total Depth 2550' Oil Well

Gas Well X Input Well SWD Well D & A X Lost Hole

Mr. Sargent was instructed to plug the well as follows:

8 5/8"-367' Circulated w/cement. 4 1/2"-2549' Cemented. Top Perf. 2352'

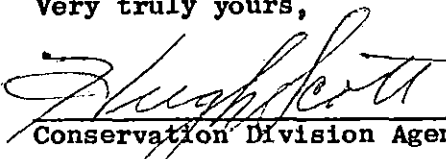
Plug bottom w/10 Sax. cement top cement 2283' Mid 2283' to 600'

Spotted 25 Sax. cement 600' to 525' Mid 525' to 350'

Spotted 25 Sax. cement 350' to 275' Mid 275' to 45'

Plug 15 Sax. cement 45' to 0

Very truly yours,


 Conservation Division Agent