


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

Edwards County, Sec. 27 Twp. 25 S Rge. (E) 16 (W)  
Location as "NE/CNW/SW" or footage from lines C SW NW  
Lease Owner D. R. Lauck Oil Company, Inc.  
Lease Name 301 So. Broadway Wichita, Kansas 67208 No. Gudney 1  
Office Address  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed January 24 19 72  
Application for plugging filed May 3 19 72  
Application for plugging approved May 5 19 72  
Plugging commenced May 25 19 72  
Plugging completed June 14 19 72  
Reason for abandonment of well or producing formation

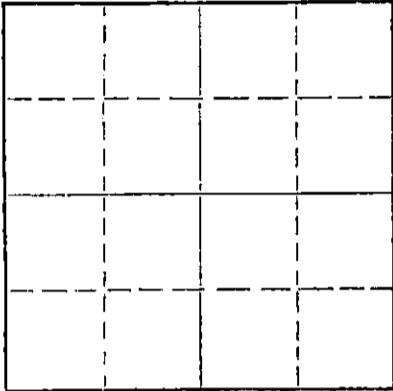

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Russell Beberstein  
Producing formation Depth to top Bottom Total Depth of Well 4482 Feet  
Show depth and thickness of all water, oil and gas formations. PB 4360

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing	Dry	3874	3889	8 5/8	270	None
Cherokee Sand	Dry	4341	4360	5 1/2	4472	3007
Mississippian	Dry	4360	4372			
Kinderhook Sand	Dry	4386	4456			
Viola	Dry	4456	4482			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sand 4360' to 4330'  
5 sacks cement 4330' to 4300'  
Globe Cementing Co. pumped 2 sacks hulls, 15 sacks Gel mud and 100 sacks cement to base of cellar.

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 22 1972  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor  
Address


STATE OF KANSAS, COUNTY OF BARTON, ss.  
H. E. Wolfe (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *H. E. Wolfe*  
P. O. Box 488 Ellinwood, Kansas 67526  
(Address)

Subscribed and Sworn to before me this 20 day of June, 1972

March 6, 1976

*Margaret E. Rensch*  
Notary Public.



Drillers Log

15-047-10069-0000

D. R. Lauck Oil Company, Inc.

Cudney #1 OWWO

C SW NW Sec. 27-25S-16W  
Edwards County, Kansas

Commenced: November 30, 1971

Completed: January 24, 1972

Casing Record: 270' 8-5/8" OWWO - Casing in place.  
4479' 5-1/2" Cemented with 100 sacks Salt Saturated Cement.

Elevation: GL 2067; DF 2069; KB 2071

Drillers Log - OWWO

Formation Tops:

	<u>Welex</u>
Heebner	3734-1663
Toronto	3755-1684
Douglas	3772-1701
Brown Lime	3874-1803
Lansing	3889-1818
Cherokee Shale	4336-2265
Cherokee Sand	4341-2270
Mississippian	4360-2289
Kinderhook Shale	4372-2301
Kinderhook Sand	4396-2315
Viola	4456-2385
TD	4483-2412

RECEIVED  
STATE CORPORATION COMMISSION

MAY 10 1972

CONSERVATION DIVISION  
Wichita, Kansas