

15-047-20699-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Edwards County. Sec. 35 Twp. 24 Rge. 17
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
SW SW NW

Lease Owner Vincent Oil Corporation
Lease Name Thurow Well No. 1
Office Address 230 O. W. Garvey Building, Wichita 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole
Date Well completed 6/21/80 19
Application for plugging filed 6/21/80 19
Application for plugging approved 6/21/80 19
Plugging commenced 6/21/80 19
Plugging completed 6/21/80 19
Reason for abandonment of well or producing formation

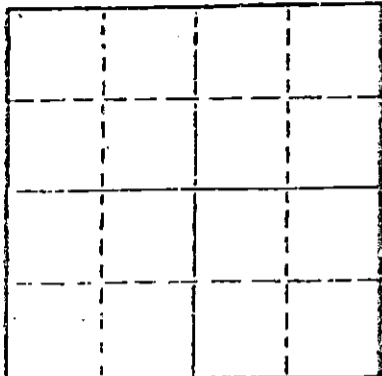

Locate well correctly on above
Section Plot

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Wm. T. Owen
Producing formation Depth to top Bottom Total Depth of Well
Show depth and thickness of all water, oil and gas formations. TD 4481'

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	264'	8-5/8"	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

1st plug @ 600' with 40 sacks
2nd plug @ 360' with 40 sacks
3rd plug @ 40' with 5 sacks
5 sacks in rathole
Job complete @ 1:15 p.m. 6/21/80

7-11-80

RECEIVED
STATE CORPORATION COMMISSION
JUL 17 1980

CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this report)
Name of Plugging Contractor Slawson Drilling Company, Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.
James C. Remsberg of Slawson Drilling Company, Inc. (employee of owner) or (owner or operator
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) James C. Remsberg
James C. Remsberg
200 Douglas Building, Wichita 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 10 day of July 19 80

Mary Lou Taylor
Mary Lou Taylor Notary Public.

My Commission expires January 17, 1981



DRILLERS LOG

OPERATOR: Vincent Oil Corporation
 230 O. W. Garvey Building
 Wichita, Kansas 67202

WELL NAME: Thurow #1
 SW SW NW Sec. 35-24S-17W
 Edwards County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
 200 Douglas Building
 Wichita, Kansas 67202

COMMENCED: 6/14/80

COMPLETED: 6/21/80

RTD: 4481'

SURFACE CASING: 8-5/8" set at 364' with 300 sx cement

0' to 77' Sand & Shale
 77' to 369' Sand & Shale (12 1/2" Surface Hole 369')
 369' to 1098' Sand & Shale
 1098' to 1970' Lime & Shale
 1970' to 2045' Shale & Sand
 2045' to 2367' Sand & Shale
 2367' to 2555' Lime & Shale
 2555' to 2780' Shale & Lime
 2780' to 4481' Lime & Shale
 RTD 4481'

STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc. hereby state the above is an accurate copy of the Thurow #1 log for Vincent Oil Corporation.

James C. Remsberg
 James C. Remsberg

Subscribed and sworn to me this 10th day of July, 1980

Mary Lou Taylor
 Mary Lou Taylor, Notary

My commission expires January 17, 1981

