

STATE OF KANSAS  
STATE CORPORATION COMMISSION

15-047-20560-0000

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Edwards County. Sec. 35 Twp. 24S Rge. 17W E/W  
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines

C NW NE

Lease Owner F. G. Holl

Lease Name Hawes #1-35 Well No. 1-35

Office Address 6427 East Kellogg, Wichita, Kansas 67207

Character of Well (Completed as Oil, Gas or Dry Hole)

Dry Hole

Date Well completed September 4, 1979

Application for plugging filed September 4, 1979

Application for plugging approved September 4, 1979

Plugging commenced 3:15 PM, Septeber 4, 1979

Plugging completed 4:30 PM, September 4, 1979

Reason for abandonment of well or producing formation

Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Wm. T. Owen

Producing formation Depth to top Bottom Total Depth of Well 4575'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	247'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud.  
Pumped through open end drill pipe  
40 sacks 50/50 Pozmix at 540' and 40 sacks  
at 240'. Solid bridge at 40' with plug and  
1/2 sack hulls and 12 sacks to surface.  
3 sacks in rathole.

9-12-79

STATE RECEIVED  
SEP 11 1979  
CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sterling Drilling Company, P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE, ss.  
F. A. Wuellner (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) F. A. Wuellner, Secretary  
STERLING DRILLING COMPANY  
P. O. Box 129, Sterling, Kansas 67579  
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of September, 1979

CHARLES M. HALL  
Rice County, Ks.  
My Appt. Exp. Jan. 31, 1982

Charles M. Hall, Notary Public.

My commission expires

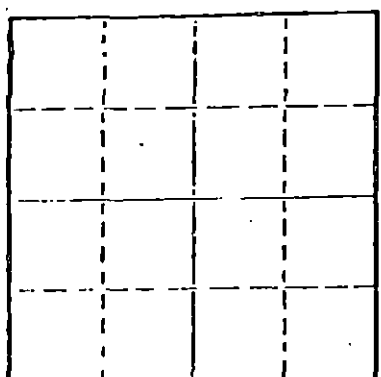

Locate well correctly on above Section Plat

15-047-20560-0000

STERLING DRILLING COMPANY  
P. O. Box 129  
Sterling, Kansas 67579

WELL LOG ----- HAWES #1-35

Located: C 1/4 NE, section 35-24-17W, Edwards County,  
Kansas

OWNER: P. G. Koll, et al  
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: August 29, 1979  
COMPLETED: September 4, 1979

TOTAL DEPTH: 4575'

<u>IDG</u>	
0 - 210	Sand and Clay
210 - 240	Shale
240 - 1152	Sand and Red Bed
1152 - 1164	Anhydrite
1164 - 1900	Shale
1900 - 2235	Shale and Lime str.
2235 - 4060	Lime and Shale
4060 - 4225	Lime, Shale, Chert
4225 - 4453	Lime and Shale
4453 - 4575	Chert and Lime

CASING RECORD

Ran 8 joints used 24#, 8 5/8" casing,  
235.62' set at 247' K.B. with 225 sacks  
60/40 Pozmix with 3 1/2 cc. Plug down at  
12:30 AM, 8-29-79, by Howco.

Flugged.

9-12-79  
CORRECTION DIVISION  
Wichita, Kansas

RECEIVED  
STATE CORPORATION COMMISSION  
SEP 12 1979

Deviation Surveys: 1 1/4° at 2185'  
3/4° at 4453'