

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Hodgeman County, Sec. 9 Twp. 24S Rge. 21(W)

Location as "NE/CNW%SW%" or footage from lines C NW NE

Lease Owner Jones-Gebert Oil, Inc.

Lease Name Schartz Well No. 1

Office Address 205 Central Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed March 1, 19 64

Application for plugging filed March 1, 19 64

Application for plugging approved March 1, 19 64


Plugging commenced March 1, 19 64

Plugging completed March 2, 19 64

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

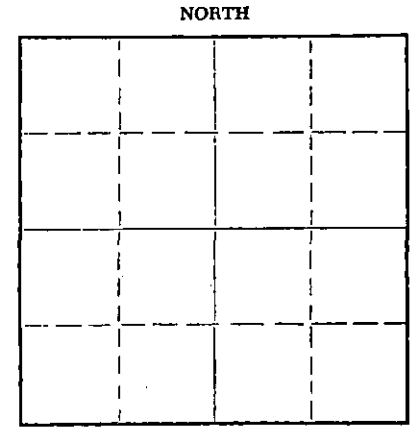

Name of Conservation Agent who supervised plugging of this well Hugh E. Scott

Producing formation Depth to top Bottom Total Depth of Well 4770' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	218'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug set at 700' with 25 sx. cement; plug set at 200' with 25 sx. cement; plug at 40' with 1/2 sx. hulls & 15 sx. cement.

3-12-64

RECEIVED
STATE CORPORATION COMMISSION

MAR 12 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Jones-Gebert Oil, Inc.

Address 205 Central Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
George R. Jones

(Signature) [Signature] or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

205 Central Building, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of March, 19 64

My commission expires January 8, 1968

[Signature] Lois J. McCoy Notary Public.

15-083-10036-0000

DRILLER'S LOG

Company: Jones-Gebert Oil, Inc.
 Contractor: Jones-Gebert Oil, Inc.
 Farm: #1 Schartz, C NW NE
 Section 9-24S-21W
 Hodgeman County, Kansas
 Commenced: 2/17/64
 Completed: 3/2/64
 Casing: 8-5/8" casing at 218' with
 190 sx.

0	-	220	Soil & Rock
220	-	260	Shale
260	-	500	Red Bed & Shale
500	-	915	Blue Shale
915	-	1030	Blaine Sand
1030	-	1725	Shale & Shells
1725	-	1995	Lime & Shale
1995	-	2300	Shale with Brown Lime Streaks
2300	-	2703	Lime & Shale
2703	-	2940	Lime
2940	-	3150	Lime & Shale
3150	-	3280	Lime & Shale Streaks
3280	- -	3895	Lime & Shale
3895	-	4695	Lime
4695	-	4770	Lime & Chert
		4770	Total Depth

I, George R. Jones, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 Schartz, C NW NE, Section 9-24S-21W, Hodgeman County, Kansas, as reflected by the files of Jones-Gebert Oil, Inc.




 GEORGE R. JONES

State of Kansas, County of Sedgwick) ss:

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 10th day of March, 1964.

My Commission Expires:
 January 8, 1968



 Lois J. McCoy, Notary Public

3-12-64
RECEIVED
 STATE CORPORATION COMMISSION
 MAR 12 1964
 CONSERVATION DIVISION
 Wichita, Kansas