


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Reno County, Sec. 25 Twp. 25S Rge. (E) 6 (W)
Location as "NE/CNW/SW" or footage from lines NW SW SE
Lease Owner O. A. Sutton
Lease Name Fowler Well No. 1
Office Address 407 Insurance Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 4 19 64
Application for plugging filed July 4 19 64
Application for plugging approved July 4 19 64
Plugging commenced July 4 19 64
Plugging completed July 4 19 64
Reason for abandonment of well or producing formation



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. L. Toman, Holyrood, Kansas
Producing formation Depth to top Bottom Total Depth of Well 3945 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	239	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud to 230', 1/2 sack hulls; set plug with 20 sacks cement. Filled hole with mud to 40', 1/2 sack hulls; set plug with 2 sacks cement in rat hole. Job complete at 5:00 p.m. 7-4-64

RECEIVED
STATE CORPORATION COMMISSION
JUL 13 1964
7-13-64
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor J. S. Sutton Drilling Company
Address 515 Orpheum Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
E. E. Wible (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. E. Wible
E. E. Wible
407 Insurance Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of July, 19 64.

My commission expires June 28, 1966.
Jean S. Taylor Notary Public.



DRILLER'S WELL LOG
JULY 7, 1964

15-155-00421-0000

Fowler #1 - O. A. SUTTON
NW SW SE Section 25-25S-6W
Reno County, Kansas


Date Commenced - 6-22-64
Date Completed - 7-4-64

<u>DEPTH</u>		<u>FORMATION</u>	<u>REMARKS</u>
<u>FROM</u>	<u>TO</u>		
40	239		Ran 7 Jts. 8-5/7" used
239	710	Shale/Lime	csg to 239' w/200 sx HA5
710	940	Lime/Shale	
940	1210	Lime	
1210	1450	Lime	
1415	1670	Lime/Shale	
1670	1995	Lime/Shale	
1995	2245	Shale/Lime	
2245	2430	Lime/Shale	
2430	2670	Lime/Shale	
2670	2720	Sandy Shale	
2720	2768	Lime/Shale	
2768	2825	Lansing	
2825	2915	Lime/Shale	
2915	3005	Lime	
3005	3065	Lime	
3065	3150	Lime	
3150	3212	Lime	
3212	3215	Lime	
3215	3305	Lime/Shale	
3305	3450	Shale/Lime	
3450	3500	Lime/Shale	
3500	3568	Miss	
3568	3611		
3611	3640	Miss/Chert	
3640	3665	Miss (Cherty)	
3665	3683	Miss	
3683	3740	Shale/Lime	
3740	3820	Shale/Lime	
3820	3880	Shale/Lime	
3880	3893	Shale/Lime	
3893	3915	DST #1/Shale/Lime	
3915	3945	Simpson T.D.	Dry and Abandoned

RECEIVED
STATE CORPORATION COMMISSION

JUL 13 1964
7-13-64
CONSERVATION DIVISION
Wichita, Kansas

I, JAMES S. SUTTON, certify that this is a true and correct copy of the Driller's Log for the well drilled in the NW SW SE Section 25-25S-6W, Reno County, Kansas, to the best of my knowledge and belief.

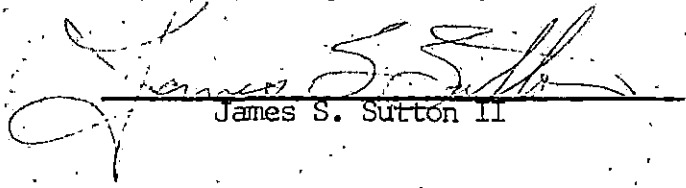
James S. Sutton II

STATE OF KANSAS)
) ss
SEDGWICK COUNTY)

Before me, the undersigned, a Notary Public, within and for said county and state, on this 7th day of July, 1964, personally appeared JAMES S. SUTTON, to me personally known to be the identical person who executed the foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.


Belva J. Dauner

My Commission expires December 11, 1965