


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Reno County, Sec. 24 Twp. 25S Rge. 5 (E) (W) X
Location as "NE/CNWxSWx" or footage from lines Center of SE SE
Lease Owner Texstar Petroleum Company
Lease Name Blocker Tom Well No. 1
Office Address 2000 NBC Building San Antonio, Texas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed 10-1-64 19____
Application for plugging approved 10-2-64 19____
Plugging commenced 10-17-64 19____
Plugging completed 10-20-64 19____
Reason for abandonment of well or producing formation _____
Dry
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

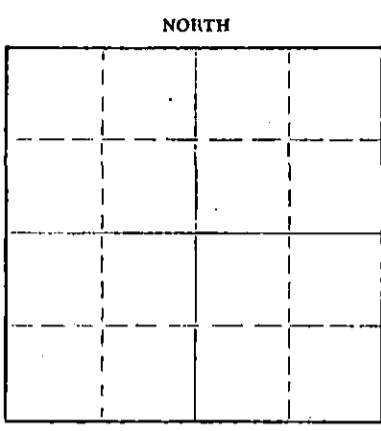

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert J. Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well PB 3112 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	255	None
				4 1/2	None	2798

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Cleaned out cellar. Sanded to 3230'. Dumped 3 sacks of cement.
Working pipe.
Working pipe. Shot pipe at 2790'. Pulling pipe.
Pulling pipe. Plugging well with mud rock bridge at 245'. Dumped 20 sacks of cement. Filled hole and rock bridge. Capped well with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
10-22-64
OCT 22 1964

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Forbes Casing Pulling, Inc.
Address P. O. Box 221 Great Bend, Kansas
CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas; COUNTY OF Barton, ss.
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
P. O. Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 21 day of October, 19 64

My commission expires May 27, 1964 5
Notary Public.

DRILLER'S LOG

COMPANY: Texstar Petroleum Company
 CONTRACTOR: LEBEN DRILLING, INC.
 FARM: ~~XXXXXXXXXXXX~~ BLOCKER-TONN Unit 1
 LOCATION: 530' FSL & 620' FEL Sec. 24-24S-5W
 RENO COUNTY, KANSAS 25
 COMMENCED: 8-20-63
 COMPLETED: 9-2-63

0	50	Surface Soil & Gravel
50	262	Shale & Shells
262	690	Shale
690	720	Anhydrite
720	980	Shale & Lime
980	1500	Lime
1500	2110	Shale & Lime
2110	2545	Lime & Shale
2545	3158	Lime
3158	3230	Lime, Chert, Shale
3230	3423	Lime
3423	3480	Lime & Shale
3480	3560	Shale & Lime
3560	3573	Lime & Chert
3573	3585	Conglomerate
3585	3625	Chat
3625	3627	Lime & Chert
3627	3658	Mississippi Chat
3658	3665	Lime
3665	3705	Mississippi Lime
3705	3791	Lime & Chert
3791	3844	Lime
3844	3875	Shale (Kinderhook)
3875	4008	Shale
4008	4010	Viola
4010	4032	Shale
4032	4048	Lime
4048	4117	Sand
4117	4133	Sandy Shale
	<u>4133</u>	<u>Rotary Total Depth</u> - Set 5 1/2" Casing

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 30 1964
 10-30-64
 CONSERVATION DIVISION
 Wichita, Kansas

Set 8 5/8" used surface casing @ 263' with 225 sacks Posmix with HA5.

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Blocker #1, located 530' FSL & 620' FEL of Section 24, Township 24 South, Range 5 West, Reno County, Kansas, as reflected by the files of Leben Drilling, Inc.

Leslie Kite
 Leslie Kite

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to before me, a Notary Public, in and for Barton County, Kansas, this 6th day of September, 1963.

Ulanda Nichols
 Ulanda Nichols, Notary Public