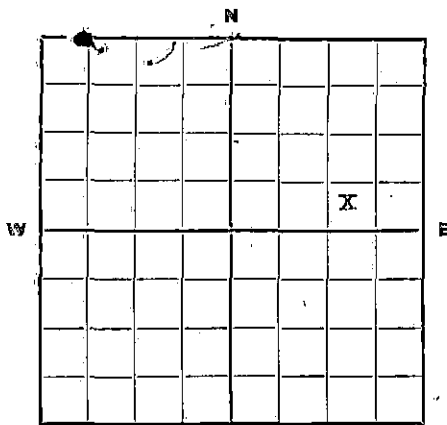


AND
PLUGGING RECORDMail To: STATE CORPORATION COMMISSION
Conservation Division
800 Biting Building
Wichita, Kansas

NOTICE: All questions on this form must be answered.

Company Operating.....Continental Oil Company
Office Address.....Ponca City, Oklahoma

Locate well correctly.

County.....Reno.....Sec. 25.....Twp. 25S.....Rge. 5 W

Farm Name.....G. F. Raymond.....Well No. 1.....Field Haven

Well Location.....SW SE NE

Name of Producing Sand.....Dry hole.....Total Depth.....4146'

Commenced Plugging.....August 29, 1944.....Finished.....August 29, 1944

DAILY AVERAGE PRODUCTION:

Initial Production: Oil.....Dry hole.....Gas.....Water.....

Production when Plugged: Oil.....Gas.....Water.....

Estimated Total Remaining Reserves Attributable to Well at Time Abandoned.....None

INFORMATION ON MATERIALS RECLAIMED FROM WELL

CASING, TUBING AND ROD DATA

8-7-44

Description	Size	Recovered		Junk		Reusable		Disposition Made Or To Be Made Of Usable Material
		Ft.	Tons	Ft.	Tons	Ft.	Tons	
10-3/4" Casing	10 3/4	33'	1/10	210	1/2	33'	1/10	Transferred to Surplus to be used at other loactions
Seamless casing	7"	4146	10	none		4146	10	

SURFACE EQUIPMENT

Quantity	Description	*Condition	Est. Tons	Disposition Made Or To Be Made Of Reclaimed Material
1	10-3/4"x7"x2" casing & tubing head & adapter flanges	New	1/2	Transferred to Surplus to be used at other locations ditto
1	7" Kerotest gate valve	used	1/2	

* Usable, Usable with minor repairs, or junk.

Date: September 4, 1944

Signed: J. P. M. District Supt.

District Superintendent

FORM-FP-1

JFN:hw
9-4-44FIL
20.25 25 54
129 22

(See note on back side) East Kansas District

3-43-5M



It is very important that all questions on this form be answered, as this Department has been asked by the Petroleum Administration for War to supply data on well abandonments undertaken during the war.

This information is very essential in aiding the war effort; therefore, this Department is requiring this report to be mailed within 5 days after the abandonment of your well.

19-6756

WELL LOG OF G. F. RAYMOND NO. 1

Date Spudded August 7, 1944
Date Completed August 26, 1944

Location; 990'W. 330'N. of E/4 corner
Sec.25 Twp.25S, R5W Reno County, Kas.

FORMATION	FROM	TO
Rock, shale & sand	0	70
Shale & sand	70	223
Shale & shells	223	1240
Lime	1240	1445
Lime & shale	1445	2275
Broken lime	2275	2360
Lime	2360	2660
Shale	2660	2740
Lime	2740	3490
Shale	3490	3565
Lime & chert	3565	3595
Chat	3595	3635
Lime & chert	3635	3781
Shale	3781	4006
Lime & shale	4006	4068
Shale & sand	4068	4115
Arbuckle	4115	4146

*Top chat 3565

*Top viola 4006

*Top simpson 4022

*Top Arbuckle 4115

* Corrected to ground level.

CASING RECORD

SIZE	WEIGHT	NEW OR SECOND HAND	SET AT	AMT SET	CEMENT USED
10-3/4"	40#	Second hand	210'9"	210'6"	280 sacks

Drilling contractor; Herndon Drilling Co
Rig Contractor; E. B. McMurtry

JPN;hw
8-28-44
STATE CORP. COM.
LPC
TMC
AMERADA PET.CORP.
STABOLIND OIL & GAS CO
GEOLOGIST
FILE

