



JOHN ANDERSON, Jr. Governor  
 RICHARD C. BYRD Chairman  
 ALVIN F. GRAUERHOLZ Commissioner  
 HARRY G. WILES Commissioner  
 RAYMOND B. HARVEY Secretary  
 CHARLES C. McCARTER Gen. Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)  
 500 Insurance Bldg. 212 N. Market  
 WICHITA, KANSAS

VERBAL PERMIT FORM  
 (To Be Filed By Plugging Agent)

11-20-62  
 RECEIVED  
 STATE CORPORATION COMMISSION  
 NOV 20 1962  
 CONSERVATION DIVISION  
 Wichita, Kansas

J. P. Roberts  
 Assistant Director  
 500 Insurance Building  
 212 North Market  
 Wichita 2, Kansas

Dear Sir:

Mr. Nathan Meltzer of Great Bend Pipe & Supply has this

date requested permission to plug the following described well:

Mr. Nathan Meltzer guarantees payment of the plugging fee.

Operator's full Name: Great Bend Pipe & Supply Co. Inc.

Complete Address: Drawer B Great Bend, Kansas

Lease Name: Tate Well No. # 1

Location: Center Sec. 35 Twp. 24 Rge. 31 (E) (W)

County Finney Total Depth 2843' Oil Well

Gas Well X Input Well    SWD Well    D & A    Lost Hole   

Mr. Nathan Meltzer was instructed to plug the well as follows:

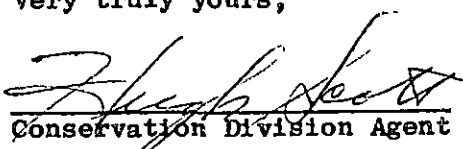
8 5/8" 550' Circulated w/cement. 5 1/2" 2843' Cemented w/100 sax.

Perforations 2843' to 2694'.

Plug bottom w/sand and 3 sax.cement-2843' to 2650'

Mud 2650' to 550' Plug and 35 sax.cement 550' to 450'

Mud 450' to 50' 10' Bridge and 15 sax.cement 50' to surface.

Very truly yours,  
  
 Conservation Division Agent