


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Reno County. Sec. 34 Twp. 25 Rge. 4W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
1200' FWL & 330' FNL
Lease Owner Africo Explorations, Inc.
Lease Name Harris Well No. 3
Office Address 2225 E. 21st St.-Suite 205, Wichita, KS
Character of Well (Completed as Oil, Gas or Dry Hole) 67214
Dry Hole
Date Well completed August 31, 1980
Application for plugging filed Verbal Application 19
Application for plugging approved Verbal Approval 19
Plugging commenced August 31, 1980
Plugging completed August 31, 1980
Reason for abandonment of well or producing formation

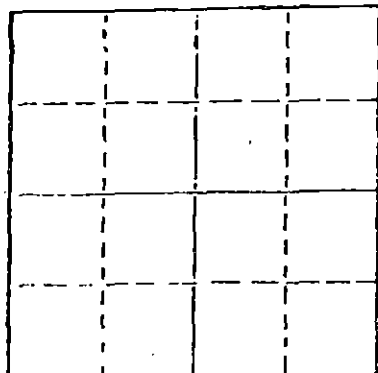

Locate well correctly on above
Section Plot

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 4,121'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	275'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Filled hole with heavy rotary mud from 4,121 ft. (rotary total depth) to 350 ft. Set plug at 350 ft. and cemented with 50 sacks cement. Filled hole with heavy rotary mud from 350 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 5 sacks cement in rat hole.

9-16-80

Plugging operations accomplished utilizing Halliburton Oil Well cement pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this record)

Name of Plugging Contractor Halliburton Services
410 Union Center Bldg., Wichita, Kansas 67202

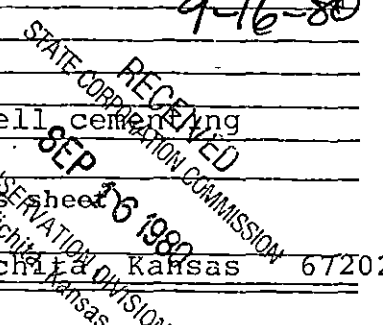

STATE OF Kansas COUNTY OF Sedgwick
Dean Britting, Agent. ~~(Signature of owner)~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
251 N. Water #10 Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of September, 1980

Elsie Willison
Elsie Willison - Notary Public.

My commission expires July 25, 1982

