


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

Reno County, Sec. 5 Twp. 25 Rge. 5 (E) W (W)

Location as "NE/CNW/SW" or footage from lines C NE/4
Lease Owner Rio Hondo Oil Co.
Lease Name Kranz #1 Well No. _____
Office Address Wichita, Kansas 826 Union Center Bldg.
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 5-9-60 19____
Plugging completed 5-12-60 19____
Reason for abandonment of well or producing formation _____

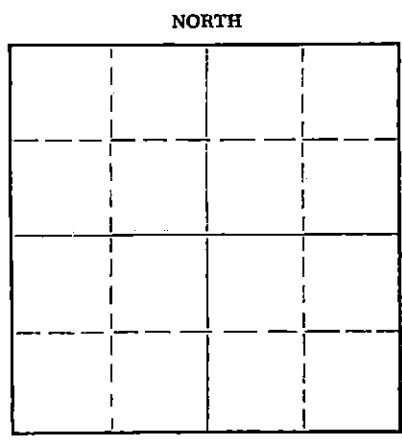

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Bill Lackamp
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3552 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	255'	none
				4-1/2"	3536'	3083'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked in the hole to 3490' and found it open. Pumped in water to kill gas and pumped in 20 sacks of cement to plug off bottom. Pulled 4 1/2" casing, cleared hole and mudded the hole to 225', set rock bridge to 205' and dumped 25 sacks of cement. Mudded the hole to 60', set rock bridge to 40' and ran 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

PLUGGING COMPLETED

MAY 24 1960 5-24-60

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Knight Casing Pulling Co.
Address Chase, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.
I, Noel J. Knight (employee of owner) or (~~owner~~ operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of May, 19 60.

My commission expires 9-27-62

James V. [Signature]
Notary Public.



WELL LOG

Operator: Geo. R. Shaw
 823 Central Building
 Wichita, Kansas

Contractor: Twin Drilling, Inc.
 1005 Central Building
 Wichita, Kansas

Casing: 255.02' 8 5/8" w/180 sax
 3559.54' 4 1/2" w/125 sax

Well: Kranz #1

Location: C NE/4 Sec. 5-258-5W
 Reno County, Kansas

Commenced: 11-24-59
 Completed: 12-6-59

Elevation: 1571 R.B.

Shale	50
Shale & Shells	130
Shale	235
Lime	253
Lime & Shale	490
Shale	800
Lime w/Shale Breaks	925
Lime broken & Shale	1220
Lime w/Shale Breaks	1595
Shale & Broken Lime w/some sand	1904
Lime & Shale	2300
Lime	2395
Lime w/Shale Breaks	2531
Shale & Lime	2800
Lime	3180
Lime & Shale	3325
Shale & Lime Breaks	3474
Miss. Chert	3490
Chat	3535
Lime	3552

R.T.D. 3552'

STATE OF KANSAS)
) ss.
 COUNTY OF SEDGWICK)

The undersigned, TWIN DRILLING, INC., hereby certifies that the above log is a true and correct log of the formations encountered in drilling the above well as reflected by the Daily Drilling Report.

TWIN DRILLING, INC.

By: Almeda Day

Subscribed and sworn to before me this 10th day of December, 1959.

James S. Pichler
 Notary Public

My commission expires September 29, 1960.

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 3 1960
 CONSERVATION DIVISION
 Wichita, Kansas

5-3-60