


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittig Building
Wichita, Kansas

NORTH

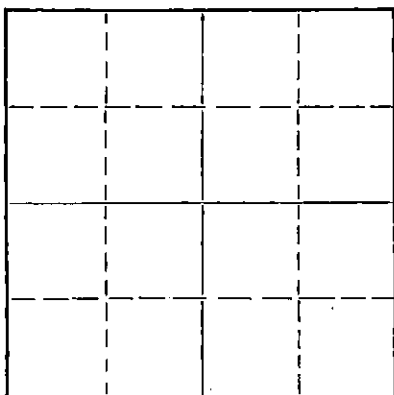

Locate well correctly on above
Section Plat

Edwards County. Sec. 27 Twp. 24S Rge. 16W (E) (W)
Location as "NE/CNW%SW%" or footage from lines SW SW NW
Lease Owner Branine-Holl
Lease Name Fisher Well No. 1
Office Address 6427 E. Kellogg - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed May 16 19 55
Application for plugging approved May 17 19 55
Plugging commenced May 27 19 55
Plugging completed May 4 19 55
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Warren Horner
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4450 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	300'	None
				5-1/2"	4425'	2335'
				Cement inside pipe drilled to 4400'. Casing perforated from 4268' to 4274'.		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled the hole with sand from 4400' to 4250' and ran 5 sacks of cement. Mudded the hole to 310', set a 10' rock bridge and ran 20 sacks of cement at 300'. Mudded the hole to 35' and ran 10 sacks of cement on top. Plugging completed.

Name of Plugging Contractor West Supply Co., Inc. (If additional description is necessary, use BACK of this sheet)
Address Chase, Kansas

STATE OF KANSAS, COUNTY OF Sedgwick, ss.
_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
(Address) _____

SUBSCRIBED AND SWORN to before me this 30th day of July, 1955

My commission expires 4-6-59

[Signature] Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

AUG 2 X 1955 8-2-55

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 27 T 24 R 16W
BOOK PAGE 119 LINE 29