


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-007-00211-0000
WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Barber County. Sec. 20 Twp. 32S Rge. 7W (E) (W)
Location as "NE/CNWxSWx" or footage from lines. NE NW SW
Lease Owner Mull Drilling Co. Inc
Lease Name L. Davis Well No. 1
Office Address 670 N. 4th. Natl. Bank Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Gas.
Date well completed 2-24-56 19
Application for plugging filed 12-1 1961
Application for plugging approved 12-1 1961
Plugging commenced 8:00 A. M. 12-1 1961
Plugging completed 4:00 P.M. 12-4 1961
Reason for abandonment of well or producing formation
Non productive.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel
Producing formation Miss. Depth to top Bottom Total Depth of Well 455' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

| FORMATION | CONTENT | FROM | TO | SIZE | DATE |
|-----------|---------|------|----|------|------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

12-12-61
RECEIVED
CASING RECORD
STATE CORPORATION COMMISSION
DEC 12 1961
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped 4 sax. cement and sanded to 3470'. Shot pipe off at 775'. Mudded to 240' and set rock bridge. dumped 3 sax cement. Bailed hole dry dumped 17 sax cement. Mudded to 40' set rock bridge 10' and dumped 10 sacks cement filling hole to top of cellar completing plugging of well.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Wilson Inc.
Address Stafford, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Joseph O. Butts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joseph O. Butts. Prod. Dept.
Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of December, 1961

My commission expires October 16, 1965

Bettie H. Salter
Notary Public.

15-007-00211-0000

DEC 12 1956
CONSERVATION DIVISION

12-12-61

ROTARY DRILLERS LOG

COMPANY : Mull Drilling Company, Inc. ROTARY DRILLING COMMENCED: 2-9-56
 Wichita, Kansas

CONTRACTOR : Mull Drilling Company, Inc. ROTARY DRILLING COMPLETED: 2-24-56
 Wichita, Kansas

CASING RECORD : Set 8 5/8" @ 160' cemented with 125 sacks cement. LOCATION: DAVIS #1
 NE NW SW of Sec. 20-32S-10W
 Barber County, Kansas


Set 5 1/2" @ 4455' cemented with 150 sacks cement.

(Figures indicate bottom of formation - measurements from top of Rotary Bushing)

| | | | |
|----------------|------|--------------------|--------------|
| Sand | 65 | Lime, Shale & Sand | 3675 |
| Red Bed | 470 | Sand | 3698 |
| Shale & Shells | 1140 | Lime | 4388 |
| Shale & Lime | 2035 | Lime & Sand | 4398 |
| Lime | 2140 | Lime (Mississippi) | 4455' R.T.D. |
| Lime & Shale | 3562 | | |

I hereby certify that this is a true and correct copy of the above log to the best of my knowledge.

MULL DRILLING COMPANY, INC.

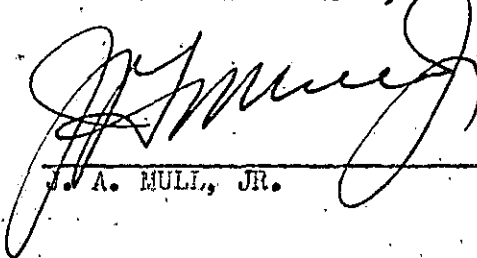

PRESIDENT

J. A. MULL, JR.

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

SUBSCRIBED and sworn to before me this 11th day of March, 1956.

Ethel Zimmersman
NOTARY PUBLIC

MY COMMISSION EXPIRES: January 28, 1957.