


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

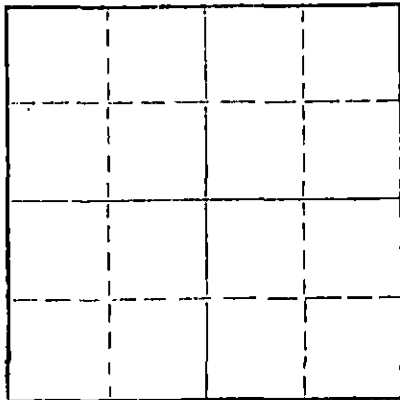

Locate well correctly on above  
Section Plat

Barber County, Sec. 20 Twp. 32S Rge. 10 (E) (W)X

Location as "NE/CNWKSWK" or footage from lines NE SW NE

Lease Owner Mull Drilling Company, Inc.

Lease Name McKeever Well No. 1

Office Address 1625 Wichita Plaza

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 3-27-67 19

Application for plugging approved 3-28-67 19

Plugging commenced 3-31-67 19

Plugging completed 4-4-67 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie V. Elving

Producing formation Depth to top Bottom Total Depth of Well 1124 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	160	None
				5 1/2	None	3603

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Moved in. Rigged up unit. Cleaned out cellar.

Sanded to 4350'. Dumped 5 sacks of cement. Working pipe.

Working pipe. Shot pipe at 3615'. Pulling pipe.

Pulling pipe. Cleaning and doping collar threads.

Cut off casing head and welded on 8 5/8 collar. Squeezed well with 10 sacks of mud and 75 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION  
APR 11 1967  
4-11-1967  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes

P. O. Box 221 Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 10 day of April 19 67

My commission expires May 27, 1969

Notary Public.

ROTARY DRILLERS LOG

COMPANY : Mull Drilling Co., Inc. ROTARY DRILLING COMMENCED: 2-5-57  
 Wichita, Kansas

CONTRACTOR : Mull Drilling Co., Inc. ROTARY DRILLING COMPLETED: 2-18-57  
 Wichita, Kansas

CASING RECORD : Set 8 5/8" @ 160' cemented LOCATION: McKEEVER UNIT #1  
 with 150 sacks cement. NE SW NE of Sec. 20-32-10W  
 Barber County, Kansas

Set 5 1/2" @ 4425' cemented  
 with 150 sacks cement.

(Figures indicate bottom of formation - measurements from top of Rotary Bushing)

Sand	90
Red Bed	550
Shale & Shells	1370
Lime & Shale	1420
Lime	2080
Lime & Shale	3170
Lime, Shale & Sand	3448
Lime & Shale	3729
Lime	4255
Lime & Shale	4375
Lime (Mississippi)	4425 R.T.D.

RECEIVED  
 STATE CORPORATION COMMISSION

MAR 30 1967

CONSERVATION DIVISION  
 Wichita, Kansas

I hereby certify that this is a true and correct copy of the above log to the best of my knowledge.

MULL DRILLING CO., INC.

BY   
 JOSEPH B. BRUNHARDT, JR.


STATE OF KANSAS

SS

COUNTY OF SEDGWICK

Subscribed and sworn to before me this 25th day of February, 1957



  
 NOTARY PUBLIC