

15-155-01021-0001
2-070662

STATE CORPORATION COMMISSION
CONSERVATION DIVISION - Plugging Section
130 S. Market, Room 2078
Wichita, Kansas 67202

12-12

API NUMBER: _____ COMP. 8/11/95

SE NE NW, SECTION 27 TOWNSHIP 22 RANGE 7W

OPERATOR LICENSE # 7873 4620 FEET FROM S SECTION LINE
OPERATOR RICK'S EXPLORATION INC. 2970 FEET FROM E SECTION LINE
NAME & 5600 NORTH MAY, SUITE 350
ADDRESS OKLAHOMA CITY, OK 73112

LEASE NAME: CHESKY #27A
COUNTY: RENO
WELL TOTAL DEPTH: 3994' 129.80
PIPE: 5 1/2" @ 3994
SURFACE CASING: 8 5/8" @ 240'

ABANDONED OIL WELL GAS WELL _____ INPUT WELL _____ SWD _____ D&A _____

OTHER WELL AS HEREINAFTER INDICATED: _____

PLUGGING CONTRACTOR: MIKE'S TESTING & SALVAGE
ADDRESS: CHASE, KS 67524 LICENSE: 31529

COMPANY TO PLUG AT: HOUR: 10:00 DAY: 12 MONTH: 12 YR: 1996

PLUGGING PROPOSAL RECEIVED FROM: DARRELL
COMPANY NAME: MIKE'S TESTING & SALVAGE PHONE: (316) 933-2943
WERE: CIBP - 2 SACKS OF COMMON
35 SACKS AT 1000'
35 SACKS AT 500'
300' - 0'

PLUGGING PROPOSAL RECEIVED BY: JACK LUTHI

PLUGGING OPERATIONS ATTENDED BY AGENT? ALL PART (_____) NONE (_____)

COMPLETED: HOUR: 2:30 DAY: 12 MONTH: 12 YEAR: 1996

ACTUAL PLUGGING REPORT: PUT 2 SACKS OF COMMON ON TOP OF CIBP - SHOT 5 1/2" CASING OFF AT 2600'. PULLED TO 1000', PUMPED 35 SACKS. PULLED TO 500', PUMPED 35 SACKS. PULL TO 300', CIRCULATE CEMENT TO SURFACE.

RECEIVED
KANSAS CORPORATION COMMISSION

12-19-96
DEC 19 1996

REMARKS: 60/40 POZ 4% GEL ALLIED #4745

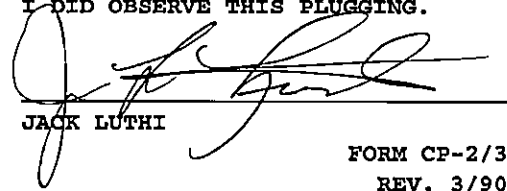
CONSERVATION DIVISION
WICHITA, KS

INVOICED

DATE JAN 03 1997

INV. NO. 47241

I DID OBSERVE THIS PLUGGING.


JACK LUTHI

FORM CP-2/3
REV. 3/90