


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

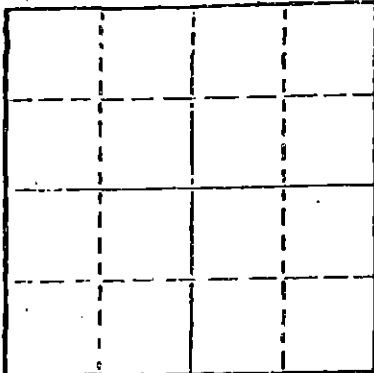

Locate well correctly on above
Section Plot

Reno County. Sec. 5 Twp. 22S Rge. 9W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C NE SW

Lease Owner Barnett Oil, Inc.

Lease Name Drake #1 Well No. 1

Office Address 1625 Vickers KSB Building, Wichita, Ks. 67202

Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

Date Well completed July 13, 1978

Application for plugging filed July 12, 1978

Application for plugging approved July 12, 1978

Plugging commenced 7:00 AM, July 13, 1978

Plugging completed 8:30 AM, July 13, 1978

Reason for abandonment of well or producing formation
Dry Hole

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 3655'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PWT IN	PULLED OUT
				8 5/8"	220'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud.

Filled hole with heavy mud to 500'.

Set 40 sack plug with 50/50 Pozmix, 2% gel to cellar through open end drill pipe. Filled hole with heavy mud.

to 210'. Set 25 sack plug with 50/50 Pozmix, 2% gel to cellar.

Set solid bridge at 40' with 1/2 sacks Halls and Halco

plug. 10 sacks 50/50 Pozmix, 2% gel to cellar.

2 sacks in rathole.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sterling Drilling Company
P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE ss.


F. A. Wuellner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) F. A. Wuellner

F. A. Wuellner, Secretary
P. O. Box 129, Sterling, Kansas 67579

Subscribed and Sworn to before me this 13th day of July 1978

My commission expires



Charles M. Hall,

Notary Public.

STERLING DRILLING COMPANY
P. O. Box 129
Sterling, Kansas 67579

WELL LOG - - - - - DRAKE #1

Located: C NE SW, Section 5-22S-9W, Reno County, Kansas

OWNER: Barnett Oil, Inc.

ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: July 5, 1978

COMPLETED: July 13, 1978

TOTAL DEPTH: 3655'

LOG

0 - 223 Sand, Clay, Red Bed
223 - 880 Shale
880 - 2305 Shale and Lime
2305 - 3655 Lime

CASING RECORD

Ran 5 joints 8 5/8", 28# used seamless casing, 208.47' cemented at 220' K.B. with 200 sacks Regular cement with 3% cc. Plug down at 1:45 PM, 7-5-78.

Plugged.