

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Reno County, Sec. 7 Twp. 22 Rge. 9 (E)W (W)

Location as "NE/CNW&SW" or footage from lines SE SE SE

Lease Owner Jay-Bee Oil Company

Lease Name Rose Well No. 1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 5-26-66 19

Plugging completed 6-1-66 19

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

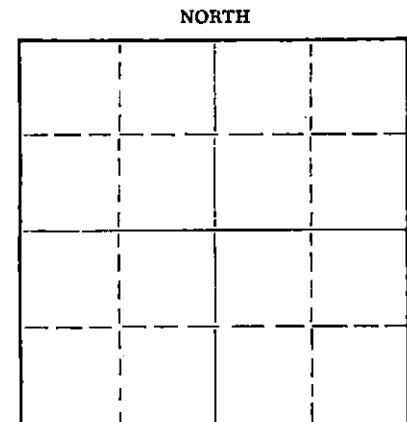

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3656 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	215'	None
				5-1/2"	3656'	1593'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3656', sanded hole to 3600' and dumped 5 sacks of cement @ 3600' with dump bailer. Pulled 5 1/2" casing, bailed hole to 210', set rock bridge to 200' and dumped 20 sacks of cement. Mudded hole to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

RECEIVED  
STATE CORPORATION COMMISSION

PLUGGING COMPLETE.

6-22-66  
JUN 22 1966

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
Noel J. Knight (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight  
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 10th day of June, 1966

My commission expires May 20, 1968

Milton J. Volin Notary Public.

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY  
500 East Murdock, Wichita, Kansas

COPY

Company- CHARLES S. RITCHIE  
Farm- Rose No. 1

SEC. 7 T. 22 R. 9W  
SE SE SE

Total Depth. 3656'  
Comm. 9-8-57 Comp. 9-19-57  
Shot or Treated.  
Contractor, Rocket Drilg. Co.  
Issued. 3-28-59

County Reno KANSAS



Elevation. 1733' DF

Production. 37 BOPD

CASING:

8 5/8" 215' cem w/175 sx.  
5 1/2" 3656' cem w/110 sx.

Figures indicate Bottom of Formations

clay	40
sand	118
shale	180
red shale	550
blue shale	825
shale & shells	900
salt & shells	1000
shale & lime	1240
lime	1780
lime & shale	1735
shale & lime	1910
lime & shale	2175
shale & lime	2360
lime	2547
shale & lime	2680
lime	2745
lime & shale	2860
lime	2929
lime & shale	3160
Kansas City lime	3224
lime	3373
lime & shale	3462
lime	3590
lime & shale	3605
lime	3615
sand & shale	3617
lime & sand	3622
lime & shale	3640
shale	3656
Total Depth	

TOPS: SCOUT	
Heebner	2917
Brown Line	3064
Lansing	3089
Viola	3521
Simpson Shale	3600
Simpson Sand	3613

**RECEIVED**  
STATE CORPORATION COMMISSIONER

MAY 31 1966

CONSERVATION DIVISION  
Wichita, Kansas