


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Reno County. Sec. 12 Twp. 22S Rge. 9 (E) 9 (W)
Location as "NE/CNW/SW" or footage from lines C NE SW
Lease Owner John C. Graves, Transcon & National Oil Co.
Lease Name Sleeper Well No. 1
Office Address 505 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 28, 1974
Application for plugging filed February 28, 1974
Application for plugging approved February 28, 1974
Plugging commenced February 28, 1974
Plugging completed February 28, 1974
Reason for abandonment of well or producing formation

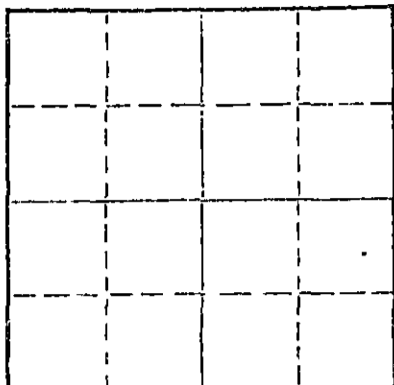

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 3550 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	220'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded up with heavy mud to 215 feet. Followed by wooden plug and 1/2 sack hulls. Placed 25 sacks cement onto hulls. Mudded up with heavy mud to 40 feet followed by wooden plug, 1/2 sack hulls and 10 sacks cement to base of well cellar. Plugged rat hole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
MAR 6 1974
3-6-74
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Graves Drilling Co., Inc.
Address 505 Union Center, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Betty Brandt (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Betty Brandt
505 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN to before me this 5th day of March, 1974

My commission expires



Mercedes Dobbins
Mercedes Dobbins Notary Public.

ROTARY DRILLERS' LOG

OPERATOR: John C. Graves, Transcon and National Oil Company
505 Union Center
Wichita, Kansas 67202

DRILLING COMMENCED: February 21, 1974

CONTRACTOR: Graves drilling Co., Inc.
505 Union Center
Wichita, Kansas 67202

DRILLING COMPLETED: February 28, 1974

CASING RECORD: 5 Jts. 220' 8-5/8"
cemented with 225 sacks

LOCATION: Sleeper No. 1
C NE SW
Section 12-22S-9W
Reno County, Kansas

0 - 150	Sand & shale
150 - 221	Red bed
221 - 350	Shale & red bed
350 - 1260	Shale & shells
1260 - 1937	Lime & shale
1937 - 2280	Lime with shale
2280 - 2910	Shale & lime
2910 - 3035	Lime
3035 - 3082	Shale
3082 - 3315	Lime
3315 - 3489	Lime & shale
3489 - 3508	Shale
3508 - 3536	Conglomerate
3536 - 3550	Shale
3550	Rotary Total Depth

RECEIVED
STATE CORPORATION COMMISSION
MAR 6 1974
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By Petty Parandh
Secretary-Treasurer

STATE OF KANSAS)
) ss.
SEDGWICK COUNTY)

Subscribed and sworn to before me, a Notary Public, this 5th of March, 1974.



Mercedes Dobbins
Mercedes Dobbins Notary Public