

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-151-22,095 - 00-00

LEASE NAME Randle

WELL NUMBER 1

2970 Ft. from S Section Line

660 Ft. from E Section Line

SEC. 14 TWP. 29S RGE. 14 (E) or (W)

COUNTY Pratt

Date Well Completed 1/22/93

Plugging Commenced 1/22/93

Plugging Completed 1/22/93

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR John O. Farmer, Inc.

ADDRESS P. O. Box 352, Russell, KS 67665

PHONE# (913) -483-3144 OPERATORS LICENSE NO. 5135

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on 1-22-93 (date)

by Steve Middleton (KCC District Agent's Name).

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom T.D. 4620'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
				8-5/8"	315'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Mud laden fluid 4620'-800' 15 sks cement in rathole
50 sks cement @ 800' 10 sks cement in mousehole
50 sks cement @ 345'
10 sks cement @ 40'

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address P. O. Box 506, Russell, KS 67665-0506

STATE OF KANSAS COUNTY OF RUSSELL, ss.

Kyle B. Branum (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.


(Signature) [Signature]
Kyle B. Branum
(Address) Box 506, Russell, KS 67665-0506

SUBSCRIBED AND SWORN TO before me this 22nd day of January 1993

[Signature]
Glenda R. Tiffin, Notary Public

RECEIVED
STATE CORPORATION COMMISSION
JAN 25 1993
CONSERVATION DIVISION
WICHITA, KANSAS

1-25-93



Commission Expires: 2-6-96

EMPHASIS OIL OPERATIONS

P. O. BOX 506

RUSSELL, KS 67665

DRILLERS LOG

OPERATOR: John O. Farmer, Inc.
P. O. Box 352
Russell, Kansas 67665

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: Randle

WELL #1

LOCATION: S/2 SE NE
Section 14-29S-14W
Pratt County, Kansas

LOGGERS TOTAL DEPTH: 4620'

ROTARY TOTAL DEPTH: 4620'

COMMENCED: 1/14/92

CASING: 8-5/8" @ 315' w/180 sks cement

ELEVATION: 1965' K.B.

COMPLETED: 1/22/92

STATUS: Dry Hole


DEPTHS & FORMATIONS

(All measurements from K.B.)

Red Bed	320'	Shale & Lime	2460'
Anhydrite	1924'	Lime & Shale	3754'
Shale	1973'	R.T.D.	4620'
Lime & Shale	2135'		


STATE OF KANSAS)
) ss
COUNTY OF RUSSELL)


Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.

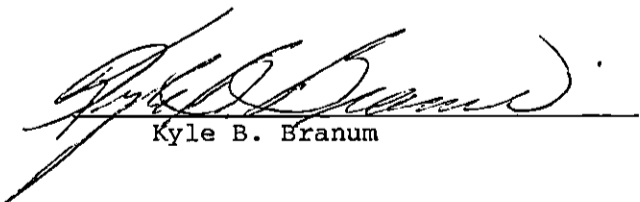
Kyle B. Branum

Subscribed and sworn to before me on January 22, 1993.

My commission expires: February 6, 1996.




Glenda R. Tiffin, Notary Public

RECEIVED
STATE CORPORATION COMMISSION
JAN 25 1993
CONSERVATION DIVISION
WICHITA, KANSAS