


15-079-20256-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

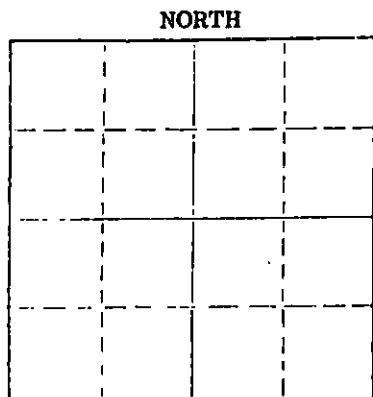

Locate well correctly on above Section Plot

Harvey County. Sec. 7 Twp. 24S Rge. 2W (E) (W)  
Location as "NE/CNW/SE/SW" or footage from lines. SE SE NE  
Lease Owner F & M Oil Co., Inc.  
Lease Name BAALMANN Well No. 1  
Office Address 505 Union Center, Wichita, Ks. 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed March 6 19 76  
Application for plugging filed March 6 19 76  
Application for plugging approved March 6 19 76  
Plugging commenced March 6 19 76  
Plugging completed March 6 19 76  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3903 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Bottom plug @ 525' w/35 sacks cement thru drill pipe. 3-10-76  
Mud to 40' w/1/2 sack hulls plug & 15 sacks cement.  
2 sacks cement in rat hole.

RECEIVED  
STATE CORPORATION COMMISSION

MAR 10 1976

CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor Duke Drilling Co. (If additional description is necessary, use BACK of this sheet)  
Address Box 823, Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF BARTON  
Larry Curtis (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God?

(Signature) Larry Curtis  
Box 823, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 9th day of March 19 76

My commission expires April 11, 1978  
Notary Public.

15-079-20256-0000

DRILLERS' WELL LOG

DATE COMMENCED: February 24, 1976  
DATE COMPLETED: March 6, 1976

F & M Oil Co., Inc.  
"BAALMANN # 1"  
SE SE NE  
Section 7-T24S-R2W  
Harvey County, Kansas

ELEVATION: 1124 K.B.

0 - 256'	Sand
256 - 460'	Clay
460 - 2488'	Shale and Lime
2488 - 2520'	Lime and Shale
2520 - 2993'	Lime
2993 - 3320'	Lime and Shale
3320 - 3776'	Chert
3776 - 3903'	Lime
3903'	RTD

FORMATION TOPS

Brown Lime	2488
Lensing	2520
Base K.C.	2993
Mississippi	3320
Hunton	3776
RTD	3903

SURFACE PIPE: Set 483' of used  
8 5/8", 28# pipe w/350 sacks Common,  
2% Gel, 3% cc.

A F F I D A V I T

STATE OF KANSAS )  
COUNTY OF BARTON ) ss.

Larry Curtis, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Larry Curtis

Subscribed and sworn to before me this 9th day of March, 1976.

Maureen M. Hague  
Notary Public

My Commission Expires: April 11, 1978

3-10-76

RECEIVED  
MAR 10 1976  
CONSERVATION DIVISION  
Wichita, Kansas

DATE COMMENCED: February 24, 1976  
DATE COMPLETED: March 6, 1976

F & M Oil Co., Inc.  
"BAALMANN # 1"  
SE SE NE  
Section 7-T24S-R2W  
Harvey County, Kansas

ELEVATION: 1424 K.B.

0 - 256' Sand  
256 - 460' Clay  
460 - 2488' Shale and Lime  
2488 - 2520' Lime and Shale  
2520 - 2993' Lime  
2993 - 3320' Lime and Shale  
3320 - 3776' Chert  
3776 - 3903' Lime  
3903' RTD

3-15-76

RECEIVED  
STATE DEPARTMENT OF REVENUE  
MAR 15 1976  
CONSULTATION DIVISION  
Wichita, Kansas

FORMATION TOPS

Brown Lime 2488  
Lansing 2520  
Base K.C. 2993  
Mississippi 3320  
Hunton 3776  
RTD 3903

SURFACE PIPE: Set 483' of used  
8 5/8", 28# pipe w/350 sacks Common,  
2% Gel, 3% cc.

A F F I D A V I T

STATE OF KANSAS )  
COUNTY OF BARTON ) ss.

Larry Curtis, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Larry Curtis

Subscribed and sworn to before me this 9th day of March, 1976.

Harold M. Mague  
Notary Public

My Commission Expires: April 11, 1978