


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

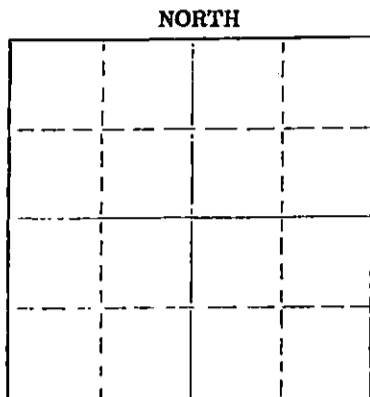

Locate well correctly on above Section Plat

Edwards County. Sec. 2 Twp. 24S Rge. 17W (W)
Location as "NE/CNV&SW" or footage from lines. C. W/2 SE/4
Lease Owner Robert F. White
Lease Name Meals #1 Well No. 1
Office Address 1014 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 19, 1975 19
Application for plugging filed May 18, 1975 19
Application for plugging approved May 18, 1975 19
Plugging commenced 7:00 AM, May 19, 1975 19
Plugging completed 9:00 AM, May 19, 1975 19
Reason for abandonment of well or producing formation
Dry Hole
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? ~~G. R. Biberstein~~ Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 1330' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	264 1/2'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

5-29-75
Filled hole with heavy mud.
Heavy mud to 250' with 35 sacks through drill pipe at 250'. Heavy mud to 40' with solid bridge, 1/4 sacks bulls, 15 sacks to surface, 2 sacks in rathole.


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor STERLING DRILLING COMPANY
Address P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE ss.
Bernard Laudermilk, (employee of owner) or (owner or operator) of the above-described

well. Using first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) Bernard Laudermilk
Bernard Laudermilk, Vice President
P. O. Box 129, Sterling, Kansas 67579
(Address)

WITNESSED AND SWORN TO before me this 22nd day of May 1975



CHARLES HALL - NOTARY PUBLIC
My Commission Expires Jan. 6, 1978
Charles M. Hall, Notary Public.

15-047-20169-0000

STERLING DRILLING COMPANY
P. O. Box 129
Sterling, Kansas 67579

WELL LOG ----- MEALS #1
Located: C W/2 SE/4, Sec. 2-24S-17N; Edwards County, Kansas

OWNER: Robert F. White
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: May 9, 1975
COMPLETED: May 19, 1975

TOTAL DEPTH: 4330'

LOG

CASING RECORD

0 - 41 Clay and Sand
41 - 266 Sand and Shale
266 - 1109 Shale, Red Bed, Sand
1109 - 1129 Anhydrite
1129 - 1300 Red Beds
1300 - 2010 Shale and Shells
2010 - 3790 Lime and Shale
3790 - 4270 Lime
4270 - 4288 Lime and Chert
4288 - 4395 Lime
4395 - 4330 Lime and Shale

Ran 6 joints 8 5/8", 28# used seamless casing, 252.91' pipe set at 264.41' K.B. Cemented with 225 sacks Pozmix #1 with 3% cc. Plug down at 9:00 PM, 5-9-75.

Plugged.

5-29-75

May 20 1975