

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-077-21213-00-00
Spot: S2SWNE Sec/Twnshp/Rge: 35-32S-5W
2970 feet from S Section Line, 1980 feet from E Section Line
Lease Name: HILLIARD Well #: 1
County: HARPER Total Vertical Depth: 4440 feet

Operator License No.: 5044
Op Name: WHITE PINE PETROLEUM CORPORATI
Address: 110 S MAIN ST STE 500
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	3769	2700	200 SX
SURF	8.625	273		200 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 12/10/2015 12:00 PM
Plug Co. License No.: 5105 Plug Co. Name: CLARKE CORPORATION
Proposal Rcvd. from: MARK MORGANSTERN Company: CLARKE CORPORATION Phone: (316) 262-5429

Proposed Plugging Method: CIBP 3324' WITH 2 SX. 35 SX 950'. 35 SX 600'. CIRCUALTE 325'-0'.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: PARTIAL
Date/Time Plugging Completed: 12/10/2015 1:30 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

A CIBP WAS SET AT 3324 7 CAPPED WITH 2 SXS CEMENT. CASING RECOVERED FROM 2700' & PULLED FROM WELLBORE. RAN 2 5/8" TUBING TO 950' SPOTTED 35 SX CEMENT. PULLED 2" TUBING TO 600' & SPOTTED 35 SX CEMENT. PULLED 2" TUBING TO 325' & CIRCULATED CEMENT TO SURFACE WITH 140 SX CEMENT.

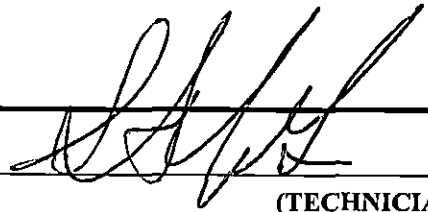
Perfs:

Top	Bot	Thru	Comments
3376	3381	CSG	

Remarks: ALLIED CEMENT. COMMON 3% CACL.

Plugged through: TBG

District: 02

Signed  (TECHNICIAN)

Received
KANSAS CORPORATION COMMISSION

DEC 18 2015

CONSERVATION DIVISION
WICHITA, KS

12-18-15

Form CP-2/3

NO. 12-30-15

SK