

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Pratt County, Sec. 14 Twp. 29S Rge. 14W (E) (W)

Location as "NE/CNW%SW%" or footage from lines E/2 SE SW

Lease Owner Raymond Oil Company, Inc.

Lease Name MOSS Well No. 1

Office Address 410 Fourth National Bank Building, Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed December 17, 1962

Application for plugging filed December 17, (Verbal) 1962

Application for plugging approved December 17, (Verbal) 1962

Plugging commenced December 17, 1962

Plugging completed December 17, 1962

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Herman Justus, Nickerson, Kansas

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	800'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug hole. Fill w/mud to 300'. Set plug w/1-1/4 Sx. hulls and 25 sxs. cement. Fill hole w/mud to 40'. Set plug w/1-1/4 Sx. hulls and 10 Sx. cement to bottom.

RECEIVED
STATE CORPORATION COMMISSION

FEB 1 1963
2-1-63
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Raymond Oil Company, Inc.

Address 410 Fourth National Bank Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Wm. M. Raymond (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wm. M. Raymond

410 Fourth National Bank Building
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of January, 1963

Barbara A. Kennedy
Notary Public.

My commission expires July 9, 1966

RAYMOND OIL COMPANY, INC. NO. 1 MOSS
E/2 SE/4 SW/4 Sec. 14-29S-14W
Pratt County, Kansas

ELEVATION: 1968 GL
1970 DF
1973 KB

Contractor: Raymond Oil Company, Inc. - Rig #3
Commenced: December 5, 1962
Completed: December 17, 1962

Casing Record:
800' of 8-5/8" w/500 Sx.

Figures Indicate Bottom of Formation

<u>Formation</u>	<u>Depth</u>
Clay	25
Sand - Clay	189
Sand	210
Red Bed - Shale	460
Sand - Shale	740
Shale	800
Shale - Shells	1300
Shale - Shells - Lime	2055
Shale - Lime	2235
Lime	2445
Lime - Shale	2805
Shale - Shells	2955
Lime - Shale	3190
Shale - Lime	3370
Lime - Shale	3495
Shale - Lime	3958
Lime	4533
Sand	4535
Shale - Sand	4565 TD

Tops

Heebner Shale	3786
Toronto Limestone	3809
Douglas Shale	3818
Douglas Sand	3923
Brown Lime	3974
Lansing Limestone	3985
Base Kansas City	4374
Viola Limestone	4468
Simpson Shale	4561
Simpson Sand	4563
Rotary Total Depth	4565


RECEIVED
STATE CORPORATION COMMISSION

FEB 1 1963

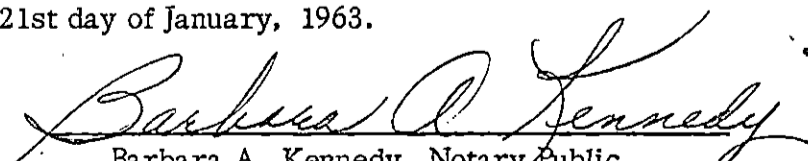
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) SS.
COUNTY OF SEDGWICK)

I hereby certify the above to be true and correct to the best of my knowledge.


Patrick R. Raymond, Vice-President

Subscribed and sworn to before me this 21st day of January, 1963.


Barbara A. Kennedy, Notary Public

My commission expires July 9, 1966.