


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Stafford County, Sec. 27 Twp. 24 Rge. (E) 15 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW SW SE $\frac{1}{2}$
Lease Owner M. B. Arner
Lease Name Dykes Well No. 1
Office Address 306 Insurance Bldg., Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed Nov. 8 19 48
Application for plugging filed Nov. 8 19 48
Application for plugging approved Nov. 8 19 48
Plugging commenced Nov. 8 19 48
Plugging completed Nov. 8 19 48
Reason for abandonment of well or producing formation.....

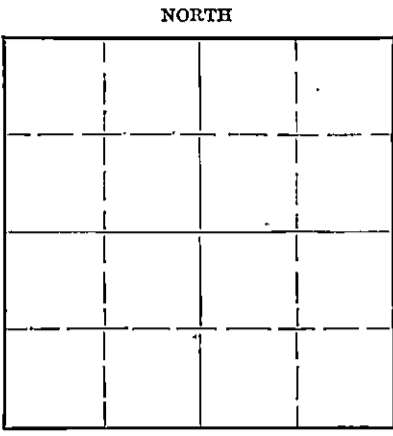

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production.....19.....
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation kinderhook Depth to top..... Bottom 1162 Total Depth of Well 1162 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	190'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to
.....feet for each plug set.

Hole full of heavy mud from bottom up to 165 ft. Set plug and 15 sacks
cement at 165 ft. Mud up to 30 ft. Set plug & 10 sacks cement at
surface.

11-13-48
Conservation Division
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to M. B. Arner
Address 306 Insurance Bldg., Wichita 2, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.
L. C. Sponenberg (employee of owner) or (conservation agent) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature) L. C. Sponenberg
306 Insurance Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 12th day of November, 19 48

Rayl T. Walton
Notary Public.

My commission expires Sept. 17, 1951



Company: M. B. Armer
 Contractor: Armer Drilling Company, Inc.
 Drilling Commenced: 10/13/48
 Drilling Completed: 11/8/48
 Elevation: 2025 D. F.
 Rotary Rig #1

Dykes #1 (Farm)
 Location: SW SW SE $\frac{1}{4}$ Sec. 27-24-15
 Stafford County
 Casing Record: 190' of 8-5/8" cemented
 with 120 sacks cement

(Figures below indicate bottom)

Surface clay, sand & shale	140
Shale & shells	240
Sand	270
Shale & shells	805
Red bed & shale	997
Anhydrite	1025
Shale & shells	1750
Shale to salt	1800
Salt	1820
Shale & shells	1905
Lime	2160
Lime & shale	2590
Lime	2715
Lime & shale	3025
Broken lime	3060
Lime	3225
Lime & shale	3275
Lime	3525
Shale & lime	3559
Lime	4207
Lime & sand	4225
Lime & shale	4273
Lime	4295
Lime & chert	4383
Lime & shale	4426
Lime	4458
Lime & shale	4462

T. D. - D & A

I hereby certify that this is a true and correct log of the above described well as shown by the drilling reports.

ARMER DRILLING COMPANY, INC.

By *[Signature]*

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Subscribed and sworn to before me, a notary public, in and for said County and State this 12th day of November, 1948.

PLUGGING
 FILE SEC 27 T 24 R 15W
 BOOK PAGE 67 LINE 31

[Signature]
 Notary Public.

My commission expires: Sept. 17, 1951