


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Edwards County, Sec. 1 Twp. 24S Rge. 16W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
SW SW NE

Lease Owner Messman-Rinehart Corp.
Lease Name Hammeke "D" #1 Well No. _____
Office Address 1432 KSTB&T Bldg, Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole) _____

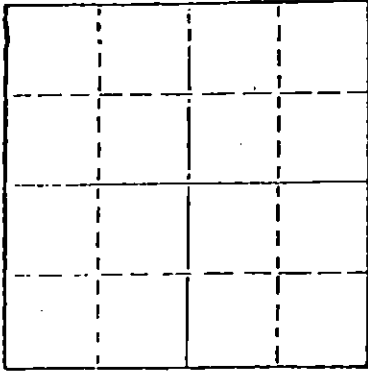

Locate well correctly on above
Section Plat

Date Well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 2/20/81 _____ 19____
Plugging completed 2/25/81 _____ 19____
Reason for abandonment of well or producing formation
Depleted

If a producing well is abandoned, date of last production
_____ 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Maurice Leslie
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4153'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	294	None
				4-1/2"	4152	2262'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged off bottom. Pushed plug to 4050, ran sand and 4 sacks cement. Made shots at 3553, 3307, 3071, 2950, 2725, 2596, 2396 and 2272. Worked pipe free and pulled a total of 69 joints. Plugged well with 15 sacks gel, 6 sacks hulls, 10 sacks gel and 125 sacks cement. Plugging complete.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KESLO CASING PULLING
CHASE, KANSAS

RECEIVED
STATE CORPORATION COMMISSION
MAR - 4 - 81
CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas COUNTY OF Rice
R. Darrell Kelso (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of March, 19 81

Joan Kelso
Notary Public.

My commission expires

