


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

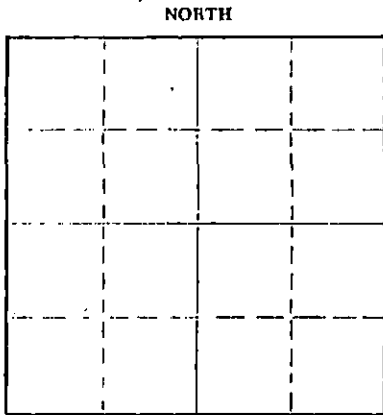

Locate well correctly on above  
Section Plat

Reno County, Sec. 26 Twp. 22 Rge. 9 (H) (W)  
Location as "NE/CNW/SW" or footage from lines SW SW SE  
Lease Owner Raymond Oil Co., Inc.  
Lease Name Abbott Well No. 1  
Office Address 410 Fourth Nat'l Bank Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed 8-25 1964  
Application for plugging filed 8-25 1964  
Application for plugging approved 8-25 1964  
Plugging commenced 8-25 1964  
Plugging completed 8-25 1964  
Reason for abandonment of well or producing formation None  
If a producing well is abandoned, date of last production 10  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well \_\_\_\_\_  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3952 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	246	8 5/8	246	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with mud to 240', plug,  
20 sks. cement, 1/2 sk. hulls,  
Mud to 40', plug, 1/2 sk. hulls,  
10 sks. cement. 2 sks. cement  
in rat hole.


9-1-64

RECEIVED  
STATE CORPORATION COMMISSION

SEP 1 1964

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Terrel Drilling and Producing  
Address Box 606, Russell, Kansas



STATE OF KANSAS, COUNTY OF RUSSELL, ss.  
Joe K. Branum (employer or owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) [Signature]  
Box 606, Russell, Kansas (Address)

Subscribed and sworn to before me this 25th day of August, 1964.  
[Signature] Notary Public.  
My commission expires 12-12-66

RECEIVED  
STATE CORPORATION COMMISSION

SEP 1 1964

9-1-64

CONSERVATION DIVISION  
Wichita, Kansas

W E L L L O G

OPERATOR: Raymond Oil Co., Inc.  
410 Fourth Nat'l Bank Bldg.  
Wichita, Kansas

CONTRACTOR: Terrel Drilling & Producing  
Box 606  
Russell, Kansas

LEASE: Abbott #1

COMMENCED: August 15, 1964

LOCATION: SW SW SE, Sec. 26-22S-9W  
Reno County, Kansas

COMPLETED: August 25, 1964

DEPTHS & FORMATIONS

Sand & Shale	246	Lime	2930
Shale & Sand	319	Lime & Shale	3045
Anhydrite	341	Lime	3565
Red Bed & Shale	1000	Lime & Chert	3588
Shale	1414	Cherty Lime	3625
Lime & Shale	1645	Lime	3727
Lime	1810	Shale & Lime	3825
Lime & Shale	2140	Cherty Lime	3873
Shale & Lime	2680	Lime (R.T.D.)	3952

STATE OF KANSAS )  
                          )  
COUNTY OF RUSSELL) ss...

Joe K. Branum, owner of Terrel Drilling and Producing, being first duly sworn on oath says: "That I have knowledge of the facts, statements and matters herein contained and the log of the above described well as filed and that the same are true and correct."

Joe K. Branum  
Joe K. Branum - TERREL DRILLING AND PRODUCING

Subscribed and sworn before me this 25th day of August, 1964.

L. L. Simpson  
Notary Public

My Commission Expires December 12, 1966.